



Discover the Art of Display...

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_



Diamond Pro Grab and Go joined with Deli/Pastry. Optional RAL color finish front and side panels



Visit our website for more finishing options and RAL colors  
[www.oscartek.com](http://www.oscartek.com)

# DIAMOND PRO 2

## Grab and Go Showcase

**DIAMOND PRO 2 GRAB & GO:** DIAMOND PRO 2 GNG1000, DIAMOND PRO 2 GNG1300, DIAMOND PRO 2 GNG1500, DIAMOND PRO 2 GNG1700, DIAMOND PRO 2 GNG2000, DIAMOND PRO 2 GNG2400, DIAMOND PRO 2 GNGA90SQ

### STANDARD FEATURES

- Double pane side glass ends
- Dixell digital control
- Diffused LED lighting 3000°K
- Straight or inclined shelves
- Polished stainless steel interior and exterior
- Self-Contained – Floor Sink Recommended
- Adjustable feet
- Cases ship standard stainless steel interior and exterior

### OPTIONS

- Stainless steel side panels in lieu of glass
- Remote/water cooled condensing unit
- Shelves fence for inclined position
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Custom height chassis modification
- Condensate heated pan with fan
- Casters

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 650.342.2400 | Fax: 650.342.7400  
[www.oscartek.com](http://www.oscartek.com)




## DIAMOND PRO 2 GRAB AND GO

DIAMOND PRO 2 GRAB & GO: DIAMOND PRO 2 GNG1000, DIAMOND PRO 2 GNG1300, DIAMOND PRO 2 GNG1500, DIAMOND PRO 2 GNG1700, DIAMOND PRO 2 GNG2000, DIAMOND PRO 2 GNG2400, DIAMOND PRO 2 GNGA90SQ


### STANDARD: DIAMOND PRO 2 GNG LINEAR MODELS

#### PLAN VIEWS

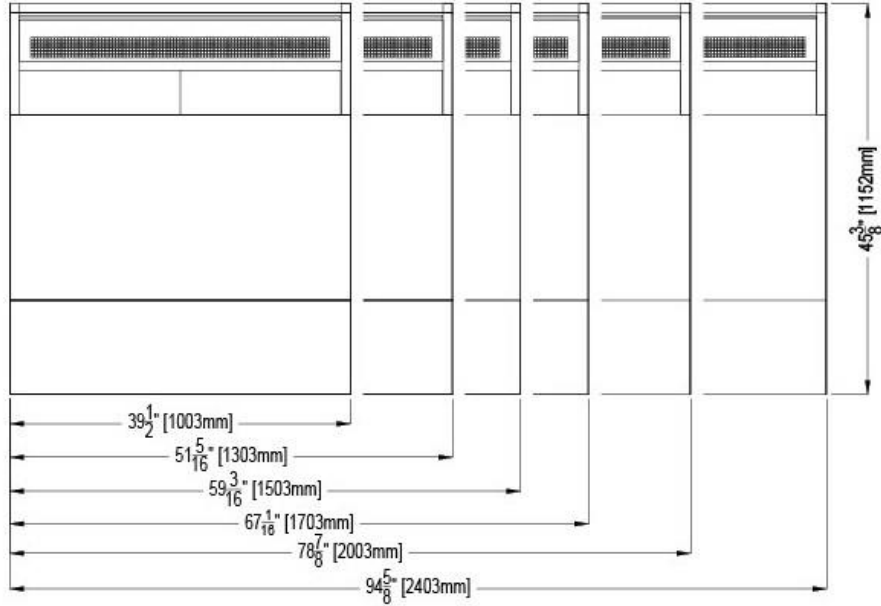

### STANDARD: DIAMOND PRO 2 GNG A90SQ MODEL

#### PLAN VIEW

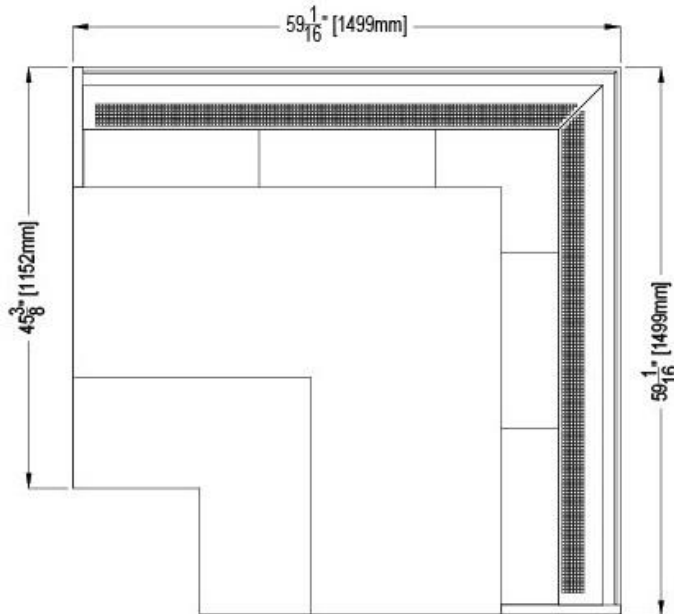


\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.


## DIAMOND PRO 2 GRAB AND GO

DIAMOND PRO 2 GRAB & GO: DIAMOND PRO 2 GNG1000, DIAMOND PRO 2 GNG1300, DIAMOND PRO 2 GNG1500, DIAMOND PRO 2 GNG1700, DIAMOND PRO 2 GNG2000, DIAMOND PRO 2 GNG2400, DIAMOND PRO 2 GNGA90SQ

### STANDARD: DIAMOND PRO 2 GRAB AND GO LINEAR MODELS REAR ELEVATIONS (OPERATOR SIDE)

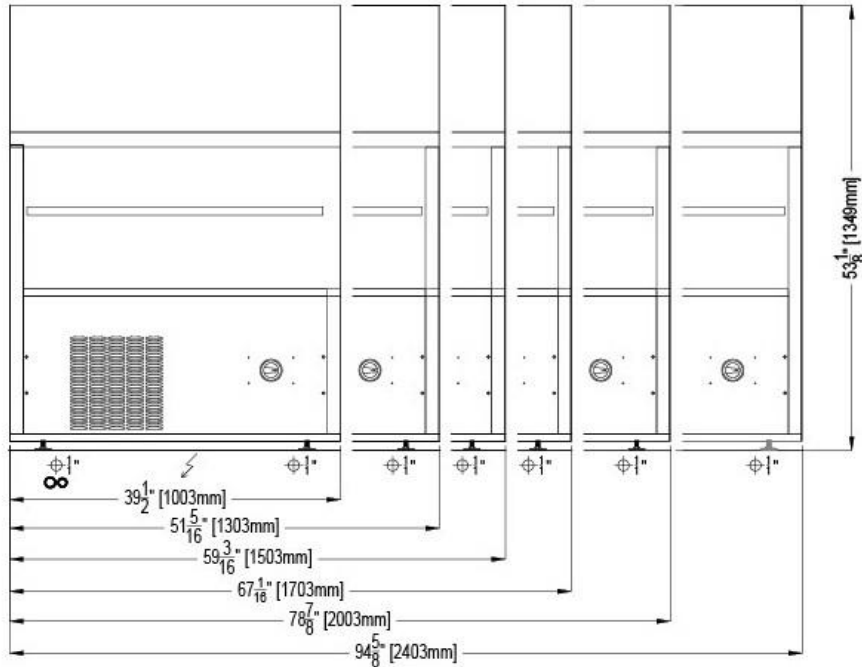

### STANDARD: DIAMOND PRO 2 GRAB AND GO SECTION VIEW

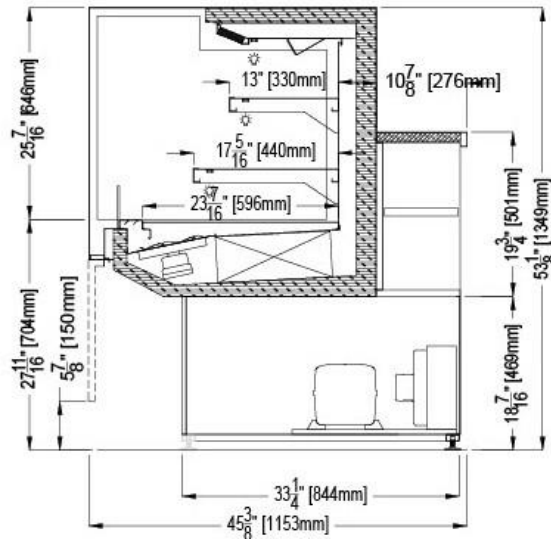

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Discover the Art of Display...

Project Name: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## DIAMOND PRO 2 GRAB AND GO

DIAMOND PRO 2 GRAB & GO: DIAMOND PRO 2 GNG1000, DIAMOND PRO 2 GNG1300, DIAMOND PRO 2 GNG1500, DIAMOND PRO 2 GNG1700, DIAMOND PRO 2 GNG2000, DIAMOND PRO 2 GNG2400, DIAMOND PRO 2 GNGA90SQ

DIAMOND PRO 2 GRAB AND GO					
TECHNICAL FEATURES		MODELS			
		DIAMOND PRO 2 GNG1000 (DMDPGNG39)	DIAMOND PRO 2 GNG1300 (DMDPGNG47)	DIAMOND PRO 2 GNG1500 (DMDPGNG59)	DIAMOND PRO 2 GNG1700 (DMDPGNG71)
External Dimensions (L-D-H) Inches-MM	Inches MM	*39 1/2" - 45 3/8" - 53 1/8" *1003 - 1152 - 1350	*51 5/16" - 45 3/8" - 53 1/8" *1303 - 1152 - 1350	*59 3/16" - 45 3/8" - 53 1/8" *1503 - 1152 - 1350	*67 1/16" - 45 3/8" - 53 1/8" *1703 - 1152 - 1350
Crated Dimensions (L-D-H) Inches-MM	Inches MM	46" - 52" - 60" 1168 - 1320 - 1524	57" - 52" - 60" 1447 - 1320 - 1524	66" - 52" - 60" 1676 - 1320 - 1524	73" - 52" - 60" 1854 - 1320 - 1524
Operating Temperature	°F	38°F - 40°F	38°F - 40°F	38°F - 40°F	38°F - 40°F
Power Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
BTU's @ +14°F Evap Temperature	BTU'S	6800	7500	8500	10000
Power Consumption	(W/A)	1450/7,8	1550/8,0	1650/8,5	1860/9,0
Pipe Size (mm)	Suction, Liquid	14 / 8	16 / 8	16 / 8	16 / 8
Net Weights	Lb	400	500	630	700
Crated Weights	Lb	490	600	730	800
<b>NOTES:</b>					
1) REMOTE APPLICATION - CONDENSING UNIT SOLD SEPERATELY					
2) FLOOR SINK RECOMMENDED ON THESE MODELS		* DIMENSIONS ARE WITH STANDARD POLISHED S/S SKIN SIDES			

DIAMOND PRO 2 GRAB AND GO					
TECHNICAL FEATURES		MODELS			
		DIAMOND PRO 2 GNG2000 (DMDPGNG79)	DIAMOND PRO 2 GNG2400 (DMDPGNG94)	DIAMOND PRO 2 GNGA90SQ (DMDPGNGSQ90)	
External Dimensions (L-D-H) Inches-MM	Inches MM	*78 7/8" - 45 3/8" - 53 1/8" *2003 - 1152 - 1350	*94 5/8" - 45 3/8" - 53 1/8" *2403 - 1152 - 1350	*59 1/16" - 45 3/8" - 53 1/8" *1152 - 1152 - 1350	
Crated Dimensions (L-D-H) Inches-MM	Inches MM	85" - 52" - 60" 2153 - 1320 - 1524	100" - 52" - 60" 2540 - 1320 - 1524	70" - 52" - 60" 1778 - 1320 - 1524	
Operating Temperature	°F	38°F - 40°F	38°F - 40°F	38°F - 40°F	
Power Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	
BTU's @ +14°F Evap Temperature	BTU'S	11000	12500	11000	
Power Consumption	(W/A)	1900/9,9	2100/12,0	1900/9,9	
Pipe Size (mm)	Suction, Liquid	16 / 8	18/10	16 / 8	
Net Weights	Lb	780	900	850	
Crated Weights	Lb	980	1000	950	
<b>NOTES:</b>					
1) REMOTE APPLICATION - CONDENSING UNIT SOLD SEPERATELY					
2) FLOOR SINK RECOMMENDED ON THESE MODELS		* DIMENSIONS ARE WITH STANDARD POLISHED S/S SKIN SIDES			

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 650.342.2400 | Fax: 650.342.7400  
 www.oscartek.com

