

Vision

Stylish display with dual temperature



The ONLY vertical display that can change from -°F (negative) to +°F (positive) temperatures with a simple adjustment. This vertical showcase can be fitted with a humidity control for Chocolate application and is capable of having front and rear access doors. LED lighting is standard.



Discover the Art of Display...

VISION

Deli/Pastry/Beverage Medium Temperature Showcases

STANDARD FEATURES

Triple pane glass on all sides
Tempered glass shelving
No defrost shut down requirement for low temp
Dixell digital controller
LED lighting
Lockable casters
Cases ship standard silver finish
Available lengths: 26"L and 34"L

OPTIONS

Front and back access doors
Custom color finish or stainless steel base
Dual temp, all in one low and medium temp
Adjustable legs



| VISION MEDIUM TEMPERATURE | | | | | | | | | |
|-----------------------------|-----------|---------------------|---------------------|---------------------|---------------------|-----------------------------|---------------------|---------------------|---------------------|
| TECHNICAL FEATURES | | Single Door | | | | Double Doors (Front & Back) | | | |
| | | V6314 H60 | V6314 H76 | V8314 H60 | V8314 H76 | V6314D H60 | V6314D H76 | V8314D H60 | V8314D H76 |
| External Dimensions (L-D-H) | Inches | 26" - 25 1/2" - 60" | 26" - 25 1/2" - 76" | 34" - 25 1/2" - 60" | 34" - 25 1/2" - 76" | 26" - 27 3/4" - 60" | 26" - 27 3/4" - 76" | 34" - 27 3/4" - 60" | 34" - 27 3/4" - 76" |
| Inches-MM | MM | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 647 - 1524 | 863 - 647 - 1930 | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 704 - 1524 | 863 - 704 - 1930 |
| Crated Dimensions (L-D-H) | Inches | 36" - 32" - 67" | 36" - 32" - 80" | 40" - 32" - 67" | 40" - 32" - 80" | 36" - 33" - 67" | 36" - 33" - 80" | 40" - 33" - 67" | 40" - 33" - 80" |
| Inches-MM | MM | 914 - 812 - 1701 | 914 - 812 - 2032 | 1016 - 812 - 1701 | 1016 - 812 - 2032 | 914 - 838 - 1701 | 914 - 838 - 2032 | 1016 - 838 - 1701 | 1016 - 838 - 2032 |
| Refrigeration | Type | R404A | R404A | R404A | R404A | R404A | R404A | R404A | R404A |
| Operating Temperature | °F | 38°F to 40°F | 38°F to 40°F | 38°F to 40°F | 38°F to 40°F | 38°F to 40°F | 38°F to 40°F | 38°F to 40°F | 38°F to 40°F |
| Compressor | Nr./Type | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic |
| BTU'S @ +14°F Evap | BTU'S | 1500 BTU'S | 1500 BTU'S | 1900 BTU'S | 1900 BTU'S | 1500 BTU'S | 1500 BTU'S | 1900 BTU'S | 1900 BTU'S |
| Temperature | BTU'S | 1500 BTU'S | 1500 BTU'S | 1900 BTU'S | 1900 BTU'S | 1500 BTU'S | 1500 BTU'S | 1900 BTU'S | 1900 BTU'S |
| Electric Supply | (V/Ph/Hz) | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 |
| Power Consumption | (A) | 8A | 8A | 9A | 9A | 9A | 9A | 10A | 10A |
| Climatic Class | F°/H.R. | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% |
| Net Weights | Kg/Lb | 215Kgs / 430Lbs | 255Kgs / 510Lbs | 240Kgs / 480Lbs | 280Kgs / 560Lbs | 250Kgs / 500Lbs | 290Kgs / 580Lbs | 280Kgs / 560Lbs | 320Kgs / 640Lbs |
| Crated Weights | Kg/Lb | 242Kgs / 485Lbs | 282Kgs / 565Lbs | 262Kgs / 525Lbs | 302Kgs / 605Lbs | 262Kgs / 525Lbs | 302Kgs / 605Lbs | 300Kgs / 600Lbs | 340Kgs / 680Lbs |

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




SINGLE DOOR

V6314 H60 & V8314 H60

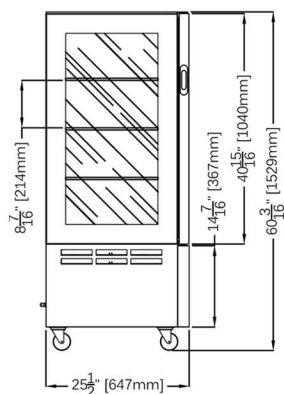


V6314 H76 & V8314 H76

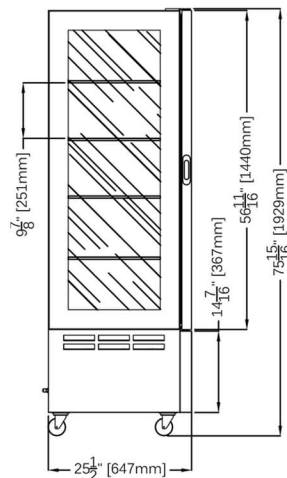


DOUBLE DOORS

V6314D H60 & V8314D H60

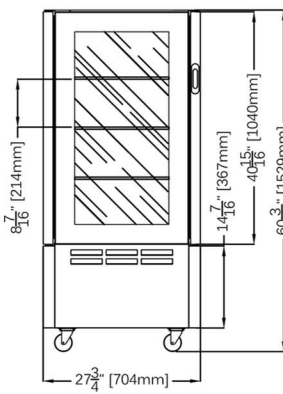


V6314D H76 & V8314D H76

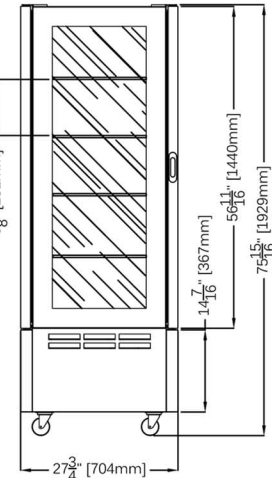


PLAN VIEWS:

SINGLE DOOR

V6314 H60/H76




V8314 H60/H76




DOUBLE DOORS

REAR ELEVATIONS:


V6314 H60




V8314 H60

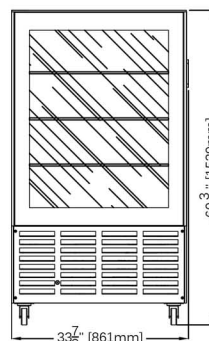

V6314 H76

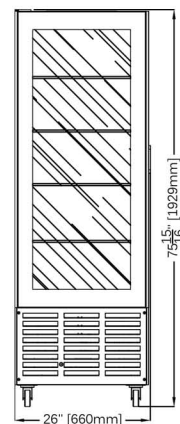


V8314 H76

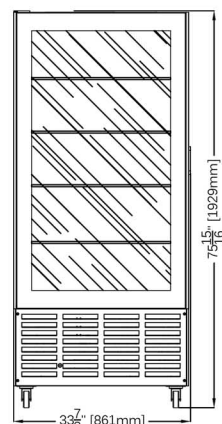


FRONT ELEVATIONS:


V6314D H60/H76

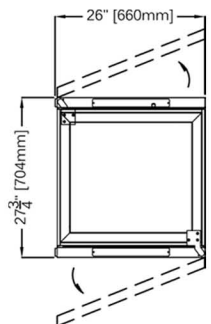


V8314D H60/H76

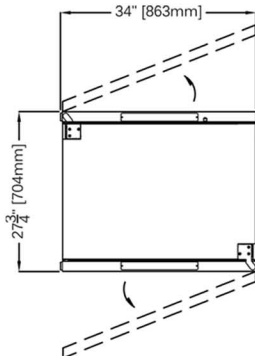


V6314 H60




V8314 H60



V6314 H76

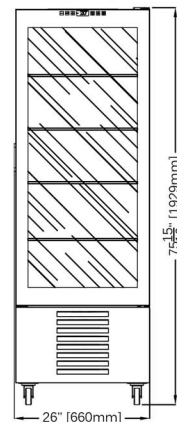

V8314 H76

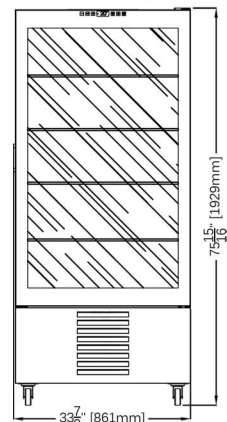

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

VISION

Chocolate Showcases

STANDARD FEATURES

Humidity control
Triple pane glass on all sides
Tempered glass shelving
No defrost shut down requirement for low temp
Dixell digital controller
LED lighting
Lockable casters
Cases ship standard silver finish
Available lengths: 26"L and 34"L

OPTIONS

Front and back access doors
Custom color finish or stainless steel base
Dual temp, all in one low and medium temp
Adjustable legs



| VISION CHOCOLATE | | | | | | | | | |
|--------------------------------|-----------|---------------------|---------------------|---------------------|---------------------|-----------------------------|---------------------|---------------------|---------------------|
| TECHNICAL FEATURES | | Single Door | | | | Double Doors (Front & Back) | | | |
| | | VC6314 H60 | VC6314 H76 | VC8314 H60 | VC8314 H76 | VC6314D H60 | VC6314D H76 | VC8314D H60 | VC8314D H76 |
| External Dimensions (L-D-H) | Inches | 26" - 25 1/2" - 60" | 26" - 25 1/2" - 76" | 34" - 25 1/2" - 60" | 34" - 25 1/2" - 76" | 26" - 27 3/4" - 60" | 26" - 27 3/4" - 76" | 34" - 27 3/4" - 60" | 34" - 27 3/4" - 76" |
| Inches-MM | MM | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 647 - 1524 | 863 - 647 - 1930 | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 704 - 1524 | 863 - 704 - 1930 |
| Crated Dimensions (L-D-H) | Inches | 36" - 32" - 67" | 36" - 32" - 80" | 40" - 32" - 67" | 40" - 32" - 80" | 36" - 33" - 67" | 36" - 33" - 80" | 40" - 33" - 67" | 40" - 33" - 80" |
| Inches-MM | MM | 914 - 812 - 1701 | 914 - 812 - 2032 | 1016 - 812 - 1701 | 1016 - 812 - 2032 | 914 - 838 - 1701 | 914 - 838 - 2032 | 1016 - 838 - 1701 | 1016 - 838 - 2032 |
| Humidity Control | Type | 35-70% | 35-70% | 35-70% | 35-70% | 35-70% | 35-70% | 35-70% | 35-70% |
| Refrigeration | Type | R404A | R404A | R404A | R404A | R404A | R404A | R404A | R404A |
| Operating Temperature | °F | 58°F | 58°F | 58°F | 58°F | 58°F | 58°F | 58°F | 58°F |
| Compressor | Nr./Type | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic |
| BTU'S @ +35°F Evap Temperature | BTU'S | 1500 BTU'S | 1500 BTU'S | 1900 BTU'S | 1900 BTU'S | 1500 BTU'S | 1500 BTU'S | 1900 BTU'S | 1900 BTU'S |
| Electric Supply | (V/Ph/Hz) | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 |
| Power Consumption | (A) | 8A | 8A | 9A | 9A | 9A | 9A | 10A | 10A |
| Climatic Class | F°/H.R. | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% |
| Net Weights | Kg/Lb | 215Kgs / 430Lbs | 255Kgs / 510Lbs | 240Kgs / 480Lbs | 280Kgs / 560Lbs | 250Kgs / 500Lbs | 290Kgs / 580Lbs | 280Kgs / 560Lbs | 320Kgs / 640Lbs |
| Crated Weights | Kg/Lb | 242Kgs / 485Lbs | 282Kgs / 565Lbs | 262Kgs / 525Lbs | 302Kgs / 605Lbs | 262Kgs / 525Lbs | 302Kgs / 605Lbs | 300Kgs / 600Lbs | 340Kgs / 680Lbs |

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.





512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



SINGLE DOOR

VC6314 H76 & VC8314 H76



VC6314 H60 & VC8314 H60

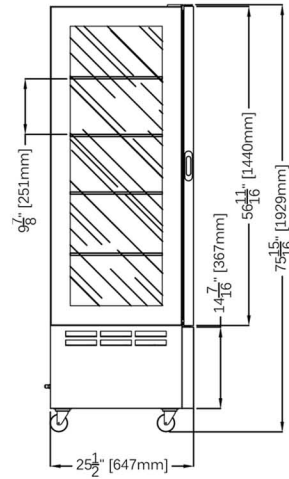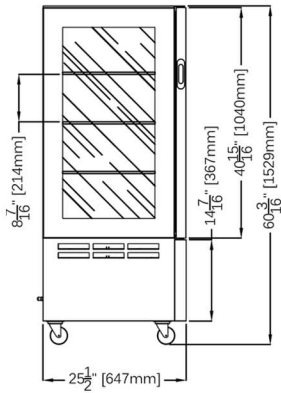

DOUBLE DOORS

VC6314D H76 & VC8314D H76


VC6314D H60 & VC8314D H60

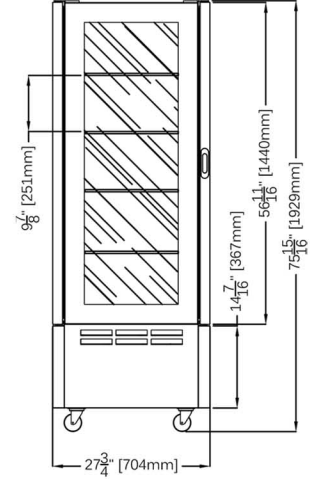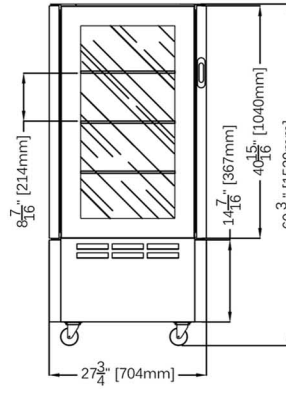


PLAN VIEWS:

SINGLE DOOR

VC6314 H60/H76




VC8314 H60/H76




DOUBLE DOORS

REAR ELEVATIONS:


VC6314 H60

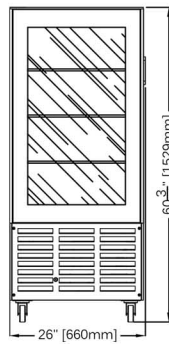


VC8314 H60



VC6314 H76

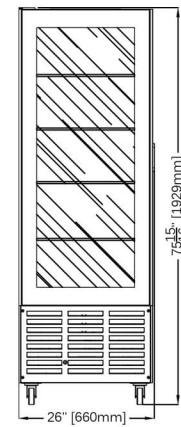


VC8314 H76

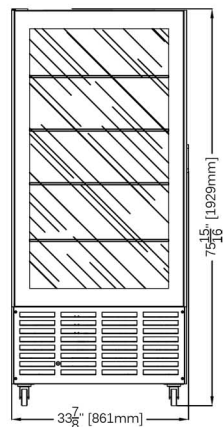


FRONT ELEVATIONS:


VC6314D H60/H76

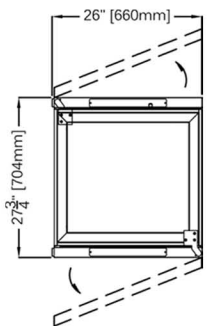


VC8314D H60/H76

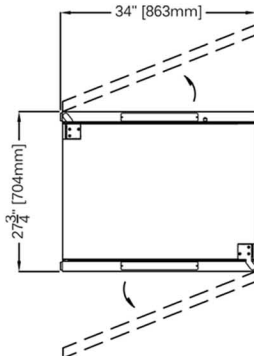


VC6314 H60




VC8314 H60



VC6314 H76

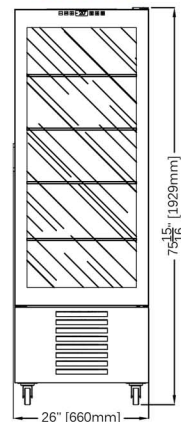

VC8314 H76

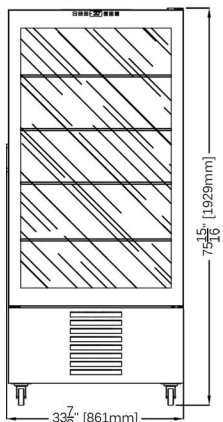

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

STANDARD FEATURES

Triple pane glass on all sides
Tempered glass shelving
LED lighting
Lockable casters
Cases ship standard silver finish
Available lengths: 26"L and 34"L

OPTIONS

Front and back access doors
Custom color finish or stainless steel base
Adjustable legs



| VISION NEUTRAL | | | | | | | | | |
|-----------------------------|-----------|---------------------|---------------------|---------------------|---------------------|-----------------------------|---------------------|---------------------|---------------------|
| TECHNICAL FEATURES | | Single Door | | | | Double Doors (Front & Back) | | | |
| | | VN6314 H60 | VN6314 H76 | VN8314 H60 | VN8314 H76 | VN6314D H60 | VN6314D H76 | VN8314D H60 | VN8314D H76 |
| External Dimensions (L-D-H) | Inches | 26" - 25 1/2" - 60" | 26" - 25 1/2" - 76" | 34" - 25 1/2" - 60" | 34" - 25 1/2" - 76" | 26" - 27 3/4" - 60" | 26" - 27 3/4" - 76" | 34" - 27 3/4" - 60" | 34" - 27 3/4" - 76" |
| Inches-MM | MM | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 647 - 1524 | 863 - 647 - 1930 | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 704 - 1524 | 863 - 704 - 1930 |
| Crated Dimensions (L-D-H) | Inches | 36" - 32" - 67" | 36" - 32" - 80" | 40" - 32" - 67" | 40" - 32" - 80" | 36" - 33" - 67" | 36" - 33" - 80" | 40" - 33" - 67" | 40" - 33" - 80" |
| Inches-MM | MM | 914 - 812 - 1701 | 914 - 812 - 2032 | 1016 - 812 - 1701 | 1016 - 812 - 2032 | 914 - 838 - 1701 | 914 - 838 - 2032 | 1016 - 838 - 1701 | 1016 - 838 - 2032 |
| Electric Supply | (V/Ph/Hz) | 120/1/60 | 120/1/60 | 120/1/60 | 120/1/60 | 120/1/60 | 120/1/60 | 120/1/60 | 120/1/60 |
| Power Consumption | (A) | 2A | 2A | 2A | 2A | 2A | 2A | 2A | 2A |
| Net Weights | Kg/Lb | 170Kgs / 340Lbs | 210Kgs / 420Lbs | 205Kgs / 410Lbs | 245Kgs / 490Lbs | 210Kgs / 420Lbs | 250Kgs / 500Lbs | 240Kgs / 480Lbs | 280Kgs / 560Lbs |
| Crated Weights | Kg/Lb | 190Kgs / 380Lbs | 230Kgs / 460Lbs | 220Kgs / 440Lbs | 260Kgs / 520Lbs | 235Kgs / 470Lbs | 275Kgs / 550Lbs | 260Kgs / 520Lbs | 3000Kgs / 600Lbs |

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




SINGLE DOOR

VN6314 H60 & VN8314 H60

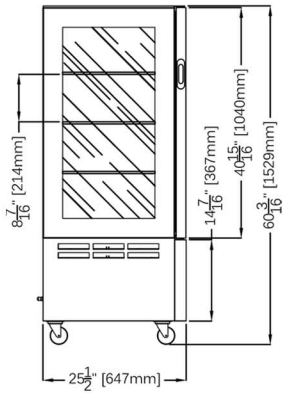


VN6314 H76 & VN8314 H76

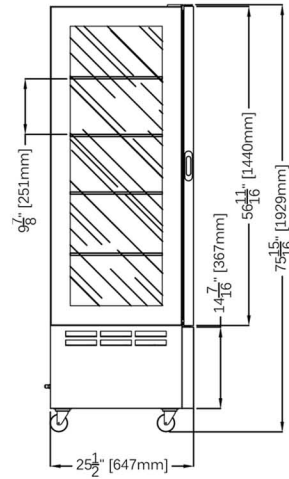


DOUBLE DOORS

VN6314D H60 & VN8314D H60

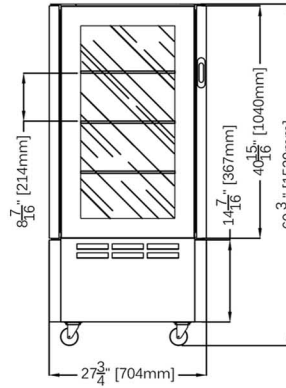


VN6314D H76 & VN8314D H76

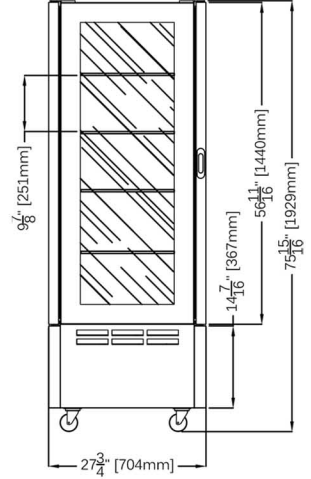


PLAN VIEWS:

SINGLE DOOR

VN6314 H60/H76




VN8314 H60/H76




DOUBLE DOORS

VN6314D H60/H76

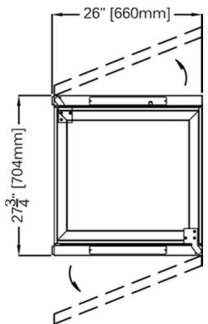


VN8314D H60/H76

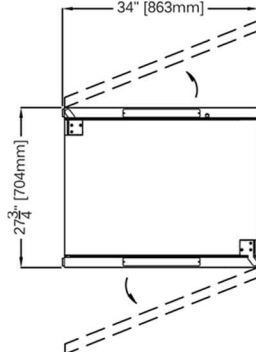


REAR ELEVATIONS:


VN6314 H60




VN8314 H60

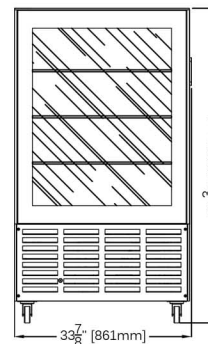

VN6314 H76

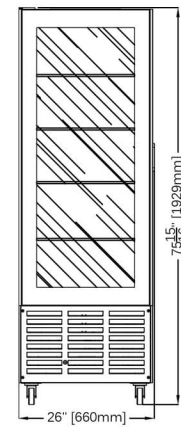


VN8314 H76

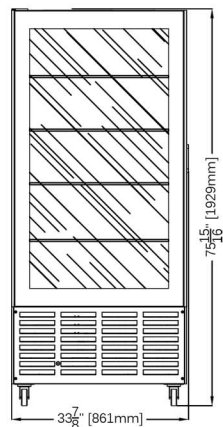


FRONT ELEVATIONS:


VN6314 H60

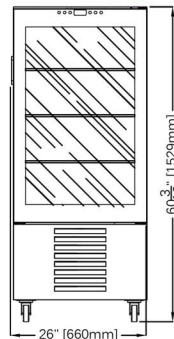


VN8314 H60

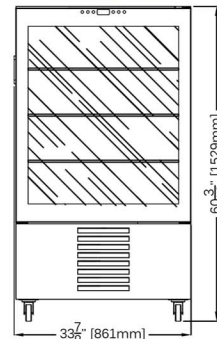

VN6314 H76

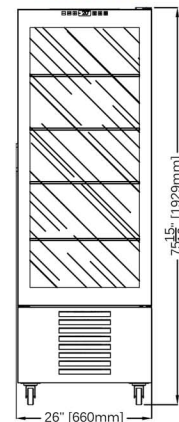

VN8314 H76

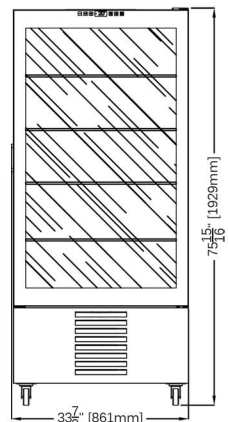

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.

VISION II

Deli/Pastry/Beverage + Ice Cream Cakes/ Frozen Novelty Dual Temperature Showcases

STANDARD FEATURES

Dual temp: all in one low and medium temperature
Triple pane glass on all sides
Tempered glass shelving
No defrost shut down requirement for low temp
Dixell digital controller
LED lighting
Lockable casters
Cases ship standard silver finish
Available lengths: 26"L and 34"L

OPTIONS

Front and back access doors
Custom color finish or stainless steel base
Adjustable legs



| VISION II DUAL TEMPERATURE | | | | | | | | | |
|--------------------------------|-----------|---------------------|---------------------|---------------------|---------------------|-----------------------------|---------------------|---------------------|---------------------|
| TECHNICAL FEATURES | | Single Door | | | | Double Doors (Front & Back) | | | |
| | | VII6314 H60 | VII6314 H76 | VII8314 H60 | VII8314 H76 | VII6314D H60 | VII6314D H76 | VII8314D H60 | VII8314D H76 |
| External Dimensions (L-D-H) | Inches | 26" - 25 1/2" - 60" | 26" - 25 1/2" - 76" | 34" - 25 1/2" - 60" | 34" - 25 1/2" - 76" | 26" - 27 3/4" - 60" | 26" - 27 3/4" - 76" | 34" - 27 3/4" - 60" | 34" - 27 3/4" - 76" |
| Inches-MM | MM | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 647 - 1524 | 863 - 647 - 1930 | 660 - 647 - 1524 | 660 - 647 - 1930 | 863 - 704 - 1524 | 863 - 704 - 1930 |
| Crated Dimensions (L-D-H) | Inches | 36" - 32" - 67" | 36" - 32" - 80" | 40" - 32" - 67" | 40" - 32" - 80" | 36" - 33" - 67" | 36" - 33" - 80" | 40" - 33" - 67" | 40" - 33" - 80" |
| Inches-MM | MM | 914 - 812 - 1701 | 914 - 812 - 2032 | 1016 - 812 - 1701 | 1016 - 812 - 2032 | 914 - 838 - 1701 | 914 - 838 - 2032 | 1016 - 838 - 1701 | 1016 - 838 - 2032 |
| Refrigeration | Type | R404A | R404A | R404A | R404A | R404A | R404A | R404A | R404A |
| Operating Temperature | °F | 0°F to +38°F | 0°F to +38°F | 0°F to +38°F | 0°F to +38°F | 0°F to +38°F | 0°F to +38°F | 0°F to +38°F | 0°F to +38°F |
| Compressor | Nr./Type | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic | Hermetic |
| BTU'S @ -25°F Evap Temperature | BTU'S | 4200 BTU'S | 4200 BTU'S | 4400 BTU'S | 4400 BTU'S | 4200 BTU'S | 4200 BTU'S | 4400 BTU'S | 4400 BTU'S |
| Electric Supply | (V/Ph/Hz) | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 | 220/1/60 |
| Power Consumption | (A) | 8A | 8A | 9A | 9A | 9A | 9A | 10A | 10A |
| Defrost | Mode/Type | Reverse Cycle | Reverse Cycle | Reverse Cycle | Reverse Cycle | Reverse Cycle | Reverse Cycle | Reverse Cycle | Reverse Cycle |
| Climatic Class | F°/H.R. | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% | 75°F/55% |
| Net Weights | Kg/Lb | 217Kgs / 435Lbs | 257Kgs / 515Lbs | 242Kgs / 485Lbs | 282Kgs / 565Lbs | 254Kgs / 508Lbs | 294Kgs / 588Lbs | 284Kgs / 568Lbs | 324Kgs / 648Lbs |
| Crated Weights | Kg/Lb | 245Kgs / 490Lbs | 285Kgs / 570Lbs | 270Kgs / 540Lbs | 310Kgs / 620Lbs | 265Kgs / 530Lbs | 305Kgs / 610Lbs | 302Kgs / 605Lbs | 342Kgs / 685Lbs |

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com





VISION II

Deli/Pastry/Beverage + Ice Cream Cakes/ Frozen Novelty Dual Temperature Showcases

SINGLE DOOR

VII6314 H76 & VII8314 H76



VII6314 H60 & VII8314 H60

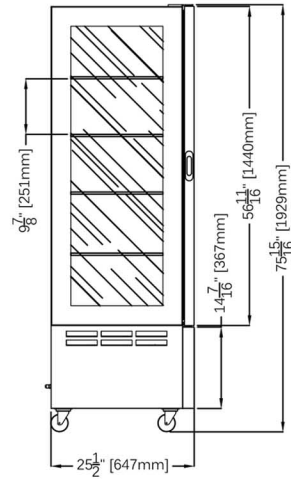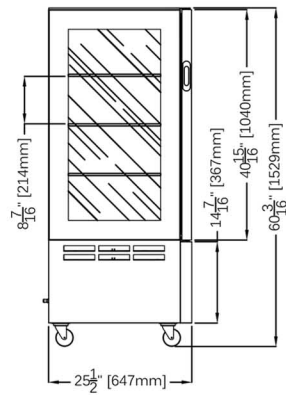

DOUBLE DOORS

VII6314D H76 & VII8314D H76


VII6314D H60 & VII8314D H60

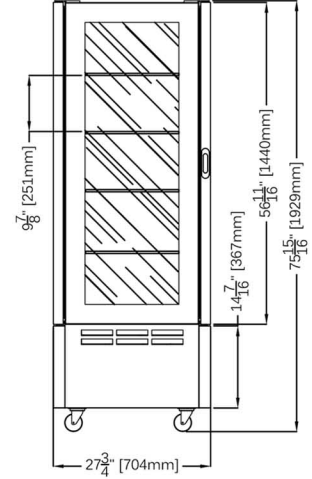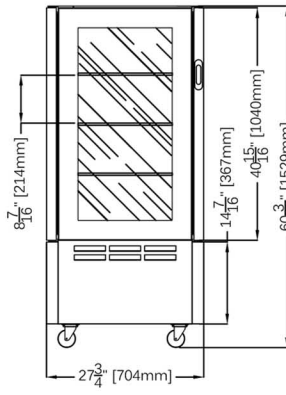


PLAN VIEWS:

SINGLE DOOR

VII6314 H60/H76




VII8314 H60/H76




DOUBLE DOORS

REAR ELEVATIONS:


VII6314 H60




VII8314 H60



VII6314 H76

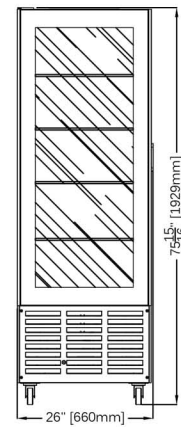


VII8314 H76

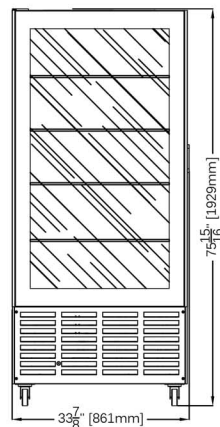


FRONT ELEVATIONS:


VII6314D H60/H76

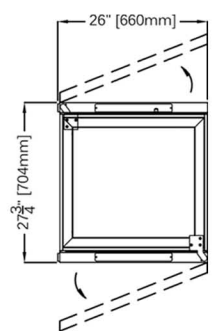


VII8314D H60/H76

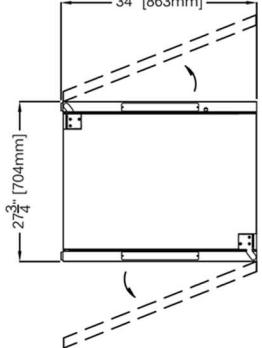


VII6314 H60

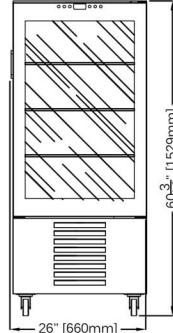


VII8314 H60

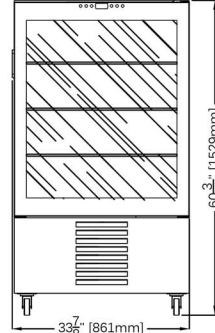

VII6314 H76

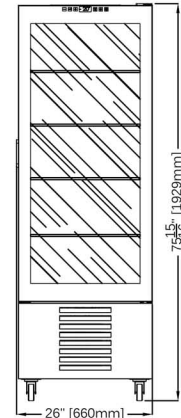

VII8314 H76

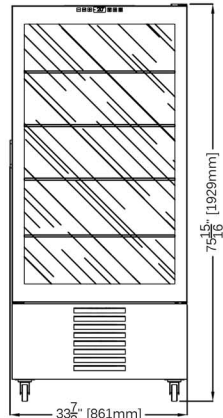

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




VISION PLUS


Deli/Pastry/Beverage + Ice Cream Cakes/
Frozen Novelty Dual Temperature Showcases



VISION PLUS V6215 H75

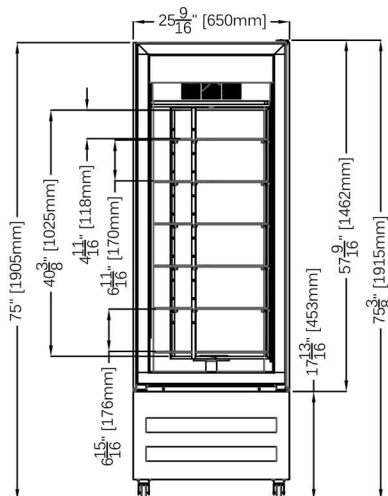

VISION PLUS V6215 H59

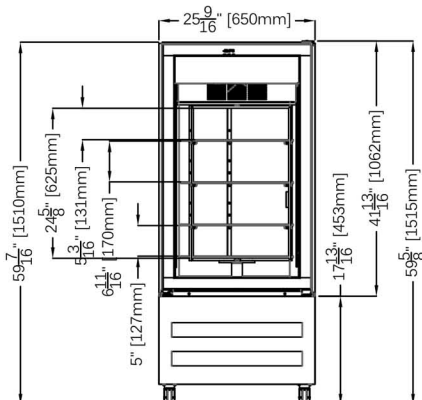

STANDARD FEATURES

- Magnetic door switch rotation stop
- Magnetic door switch fan stop
- Dual temp all in one low and medium temperature
- Revolving display shelves
- Triple pane glass on all sides
- Tempered glass shelving
- No defrost shut down requirement for low temp
- Dixell digital controller
- LED lighting
- Lockable casters
- Cases ship standard silver finish

OPTIONS

- Remote
- Custom color finish or stainless steel base
- Adjustable legs

| VISION PLUS (REVOLVING SHELVES) | | | |
|---------------------------------|-----------|-------------------------------|-------------------------------|
| TECHNICAL FEATURES | | MODELS | |
| | | VISION PLUS V6215 H59 | VISION PLUS V6215 H75 |
| External Dimensions (L-D-H) | Inches | 25 9/16" - 25 9/16" - 59 5/8" | 25 9/16" - 25 9/16" - 75 3/8" |
| | MM | 650 - 650 - 1515 | 650 - 650 - 1915 |
| Crated Dimensions (L-D-H) | Inches | 31" - 31" - 65" | 31" - 31" - 80" |
| | MM | 787 - 787 - 1651 | 787 - 787 - 2032 |
| Refrigeration | Type | R404A | R404A |
| Operating Temperature | °F | 0°F to +38°F | 0°F to +38°F |
| Compressor | Nr./Type | Hermetic | Hermetic |
| Cooling Power | BTU'S | 1500 BTU'S | 1500 BTU'S |
| Electric Supply | (V/Ph/Hz) | 220/1/60 | 220/1/60 |
| Power Consumption | (A) | 8A | 8A |
| Climatic Class | F°/H.R. | 75°F/55% | 75°F/55% |
| Net Weights | Kg/Lb | 215Kgs / 430Lbs | 255Kgs / 510Lbs |
| Crated Weights | Kg/Lb | 242Kgs / 485Lbs | 282Kgs / 565Lbs |

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



STANDARD FEATURES

Touch Screen display control panel integrated in the door
Audible and visual alarm signals
HACCP functions with temperature records
UV lamp
Hanging rack for Meat
5 glass shelves
Dry aging technology (no water connection)
Stainless Steel interior
Environment friendly NON CFC Insulation
Tempered triple pane glass
Castors

OPTIONS

Wi-Fi connectivity
Lock
RAL color exterior
Remote or Water cooled
Adjustable feet



| VISION DRY AGED MEAT | | | |
|--------------------------------|-----------|---------------------------------|--------------------------|
| TECHNICAL FEATURES | | MODELS | |
| | | VISION V6714 | VISION V8714 |
| External Dimensions (L-D-H) | Inches | 25 11/16" - 25 13/16" - 90 5/8" | 33 9/16" - 26" - 90 5/8" |
| Inches-MM | MM | 652 - 655 - 2302 | 852 - 660 - 2302 |
| Crated Dimensions (L-D-H) | Inches | 31" - 32" - 97" | 40" - 32" - 97" |
| Inches-MM | MM | 787 - 813 - 2464 | 1016 - 813 - 2464 |
| Shelves | # | 5 Shelves + Hanging Rack | 5 Shelves + Hanging Rack |
| Refrigeration | Type | R452A | R452A |
| Operating Temperature | °F | 32-39°F | 32-39°F |
| BTU's @ +20°F Evap Temperature | BTU'S | 1600 BTU'S | 2100 BTU'S |
| Electric Supply | (V/Ph/Hz) | 208-220/1/60 | 208-220/1/60 |
| Power Consumption | (A) | 12A | 13A |
| Humidity Range | H.R.% | 20-90% | 20-90% |
| Load Capacity | Kg/Lb | 120Kg / 264Lbs | 156Kg / 344Lbs |
| Noise dBA Level | (dBA) | 67.1 | 67.1 |
| Net Weights | Kg/Lb | 225Kgs / 496Lbs | 270Kgs / 595Lbs |
| Crated Weights | Kg/Lb | 250Kgs / 551Lbs | 295Kgs / 650Lbs |


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




VISION 6714




PLAN VIEW

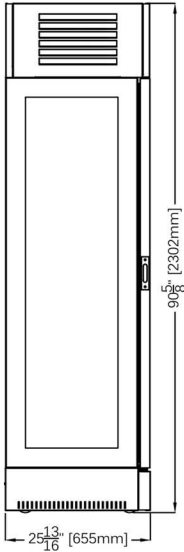

LEFT SIDE

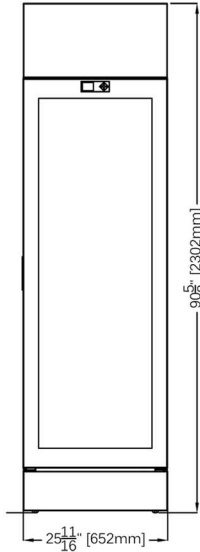


FRONT VIEW

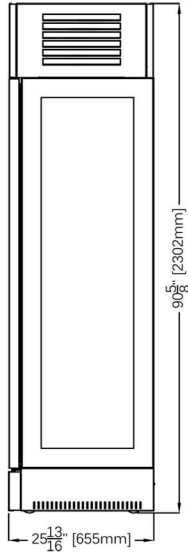

RIGHT SIDE




BACK VIEW

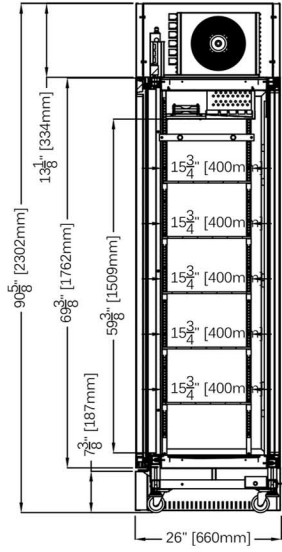


SECTION VIEW


VISION 8714




PLAN VIEW

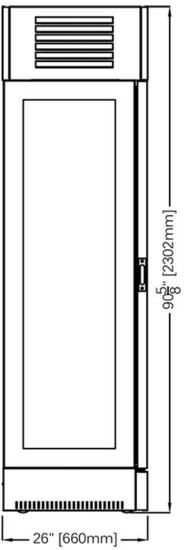


LEFT SIDE

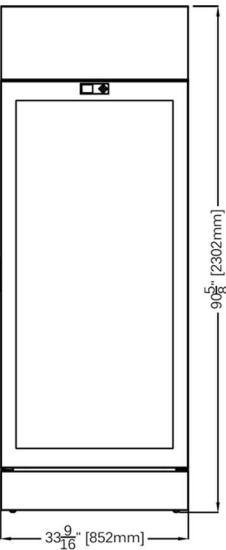


FRONT VIEW

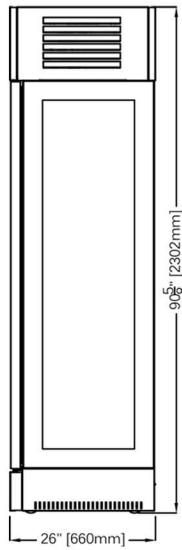

RIGHT SIDE

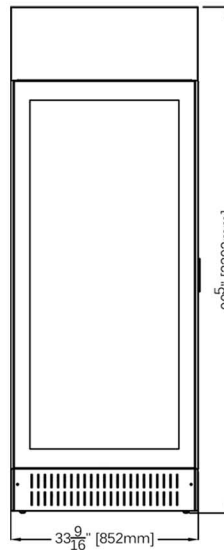

BACK VIEW

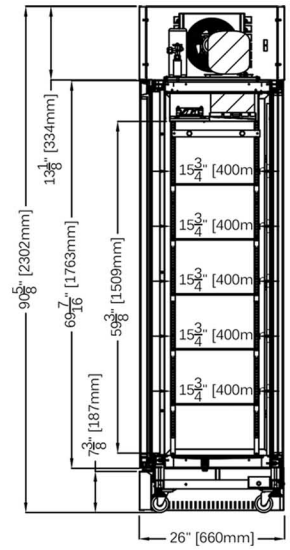

SECTION VIEW

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.