

RC SERIES FRONT & BACK COUNTERS

REFRIGERATED COUNTERS

ALL METAL CONSTRUCTION

SOLID DOORS & DRAWERS



GLASS DOORS & DRAWERS







STANDARD FEATURES

- ETL approval for UL safety and NSF sanitation
- Patented access system for electrical plumbing and refrigeration
- Stainless steel adjustable feet
- Aisi 304 stainless steel module with BA external finish and 2B internal stainless steel
- Round corners inside the model
- Ecological CFC free polyurethane foam
- Stainless steel intermediate and adjustable shelf
- High capacity evaporator with fan system
- Digital Dixell control with safe housing
- Stainless steel counter bar
- Stainless steel doors
- Ventilated refrigerated
- Self contained
- Steel frame

OPTIONS

- Stainless steel sliding drawers
- Glass doors
- Glass sliding drawers
- Stone top
- Casters
- Work top options:

-  Flat
-  Back splash 8"H (199mm)
-  Pre-arrangement for service top
-  Round per "Compact Round"

REFRIGERATED COUNTERS SPECIFICATIONS

CODES	MODELS	LENGTHS	DEPTHS	HEIGHT	# OF DOORS	WEIGHTS (LBS)	VOLTAGES	AMPS
BRPVF1P58H75	500A	20" (500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	1	84	120	2
BRPVF1P65H75	500B	20" (500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	1	88	120	2
BRPVF2P58H75	1000A	40" (1000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	2	156	120	6
BRPVF2P65H75	1000B	40" (1000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	2	201	120	6
BRPVF1P58H75	1000TA	40" (1000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	1	220	120	7
BRPVF1P65H75	1000TB	40" (1000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	1	230	120	7
BRPVF3P58H75	1500A	60" (1500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	3	242	120	4
BRPVF3P65H75	1500B	60" (1500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	3	251	120	4
BRPVF2P58H75	1500TA	60" (1500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	2	240	120	8
BRPVF2P65H75	1500TB	60" (1500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	2	251	120	8
BRPVF4P58H75	2000A	80" (2000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	4	306	120	5
BRPVF4P65H75	2000B	80" (2000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	4	317	120	5
BRPVF3P58H75	2000TA	80" (2000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	3	316	120	8
BRPVF3P65H75	2000TB	80" (2000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	3	330	120	8
BRPVF5P58H75	2500A	98" (2500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	5	383	120	7
BRPVF5P65H75	2500B	98" (2500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	5	418	120	7
BRPVF4P58H75	2500TA	98" (2500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	4	380	120	9
BRPVF4P65H75	2500TB	98" (2500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	4	394	120	9
BRPVF6P58H75	3000A	118" (3000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	6	380	120	7
BRPVF6P65H75	3000B	118" (3000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	6	395	120	7
BRPVF5P58H75	3000TA	118" (3000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	5	308	120	10
BRPVF5P65H75	3000TB	118" (3000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	5	318	120	10

T= Self Contain | Without T= Remote

A= 25 3/4" (655mm) | B= 29 1/2" (750mm)



1441 Rollins Roads, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com




RC SERIES FRONT & BACK COUNTERS



REFRIGERATED COUNTERS

OPTIONAL BACK SPLASH 8" H (199mm) SHOWN

A - 25 3/4" D (655mm)
SIDE VIEW



B - 29 1/2" D (750mm)
SIDE VIEW

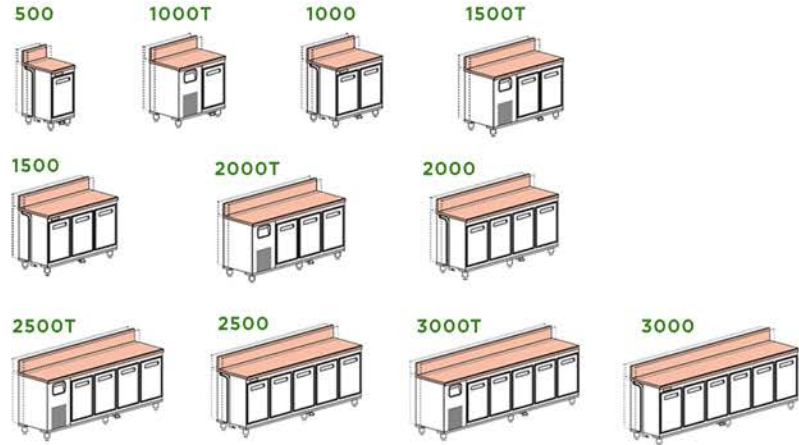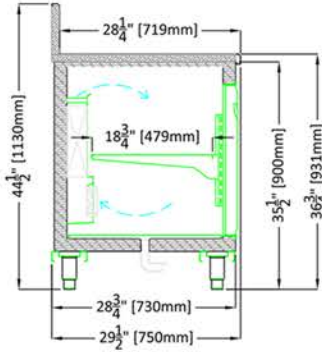


T = Self Contain | Without T = Remote

PLAN VIEWS

A - 25 3/4" D (655mm)



B - 29 1/2" D (750mm)



A - 25 3/4" D (655mm)




B - 29 1/2" D (750mm)



T = Self Contain | Without T = Remote

REAR ELEVATIONS (OPERATOR SIDE)

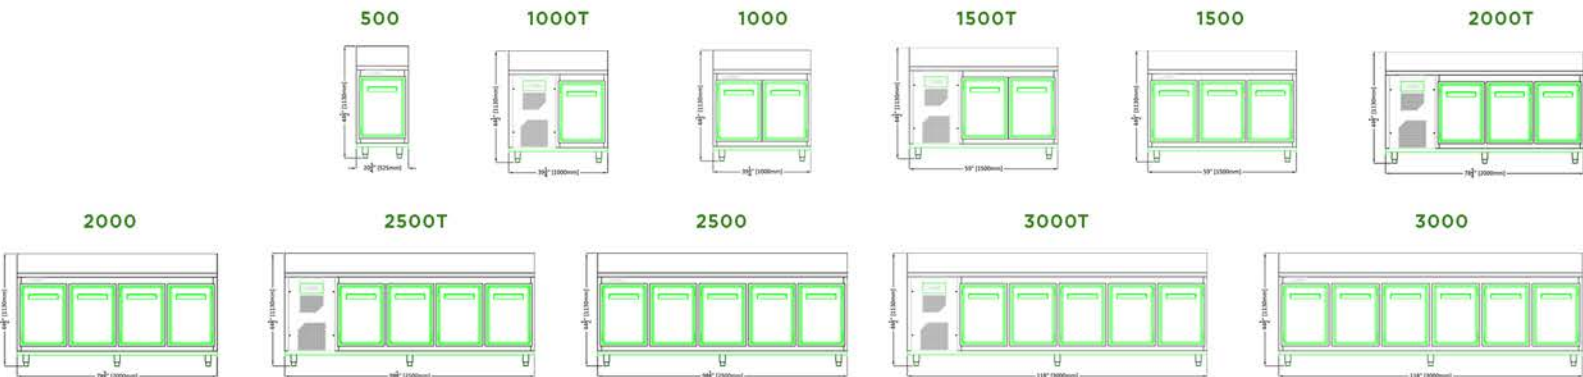

T = Self Contain | Without T = Remote



1441 Rollins Roads, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

