



# DIAMOND

# Chocolate Showcase


## DIAMOND 1 - 46 1/8"H

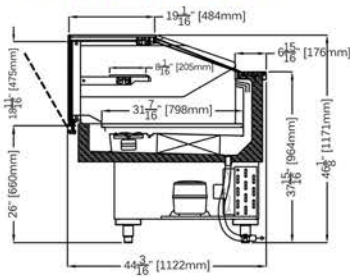

## DIAMOND 2 - 53 3/4"H

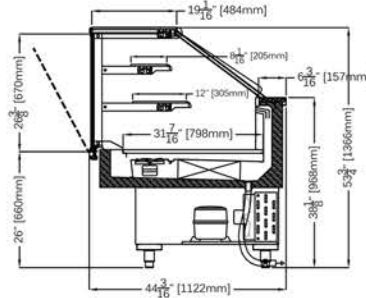

## DIAMOND 3 - 59 1/8"H

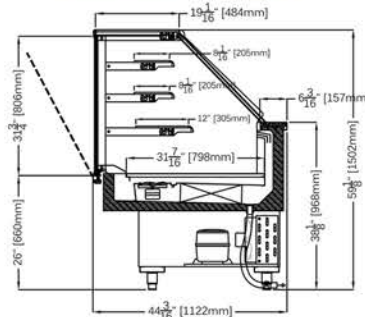


### STANDARD FEATURES

- Available heights 46"H, 54"H, and 59"H
- Chrome finishing
- Diamond 2: top shelf non-refrigerated
- Diamond 3: top (2) shelves non-refrigerated
- LED lighting on each shelf
- Electric control board
- Electric defrost
- Front glass with safely tilt down opening system
- Humidity Control
- Pyrolytic anti-fog front & side glass
- Cases ship standard unfinished


### OPTIONS

- Remote condensing unit
- Condensate water tray with electric evaporation
- RAL color/laminate front and side panels
- Casters

30° Open



30° Closed



DIAMOND CHOCOLATE						
TECHNICAL FEATURES		MODELS				
		DIAMOND 2 C1110	DIAMOND 2 C1610	DIAMOND 2 C2106	DIAMOND 2 CA30	DIAMOND 2 CC30
External Dimensions (L-D-H)	Inches	* 44" - 44 3/16" - 53 3/4"	* 63 11/16" - 44 3/16" - 53 3/4"	* 83 1/4" - 44 3/16" - 53 3/4"	* 63" - 44 3/16" - 53 3/4"	* 39 1/2" - 44 3/16" - 53 3/4"
	MM	1118 - 1122 - 1366	1618 - 1122 - 1366	2114 - 1122 - 1366	1601 - 1122 - 1366	1003 - 1122 - 1366
Crated Dimensions (L-D-H)	Inches	52" - 52" - 61"	70" - 52" - 61"	90" - 52" - 61"	70" - 52" - 61"	46" - 52" - 61"
	MM	1320 - 1320 - 1549	1778 - 1320 - 1549	2286 - 1320 - 1549	1778 - 1320 - 1549	1168 - 1320 - 1549
Humidity Control	Type	35-70%	35-70%	35-70%	35-70%	35-70%
Refrigeration Display Area	Type	Deck + Lower Shelf	Deck + Lower Shelf	Deck + Lower Shelf	Deck + Lower Shelf	Deck + Lower Shelf
Operating Temperature	°C / °F	14°C / 58°F	14°C / 58°F	14°C / 58°F	14°C / 58°F	14°C / 58°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +35°F Evap						
Temperature	BTU'S	3520 BTU'S	4160 BTU'S	4480 BTU'S	4800 BTU'S	3840 BTU'S
		230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)
Electric Supply	(V/Ph/Hz)	220/1/60 (USA)	220/1/60 (USA)	220/1/60 (USA)	220/1/60 (USA)	220/1/60 (USA)
Power Consumption	(W/A)	1085W / 8.2A	1190W / 8A	1490W / 9A	1170W / 8A	1140W / 8A
Defrost	Mode/Type	Electric	Electric	Electric	Electric	Electric
Climatic Class	N°/°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	205Kgs / 650Lbs	275Kgs / 606Lbs	340Kgs / 749Lbs	250Kgs / 551Lbs	250Kgs / 551Lbs
Crated Weights	Kg/Lb	315Kgs / 694Lbs	425Kgs / 936Lbs	530Kgs / 1168Lbs	400Kgs / 881Lbs	400Kgs / 881Lbs

\* Dimensions are without side panels & with Diamond 2 technical features

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

