

# Gia



## Best in its class



This robust showcase has the interior of a first class Gelato display. Gia is the only one to have a split deck that allows for best cooling and temperature distribution on both, front and back rows. It has Pyrolytic heated front glass and an angled display with LED lighting as standard.



*Discover the Art of Display...*


# *Gia* Photos



361-367 Beach Road, Burlingame, CA 94010  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com


# GIA (CURVED GLASS)

# Gelato Showcase

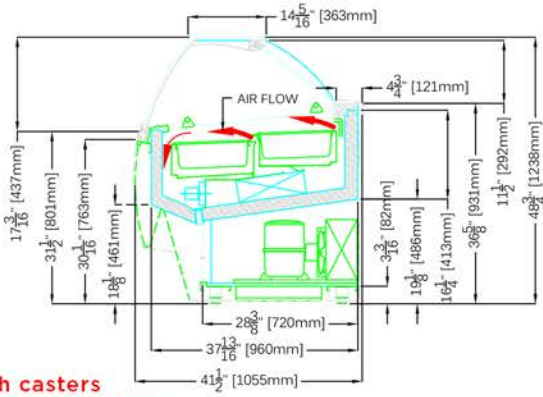

**Note: with casters**  
**Casters height: 4 3/8" H**  
**Overall height: 49 7/8" H**

### OPTIONAL: SHOWN WITH POPSICLE TRAYS



### STANDARD FEATURES

- LED lighting system
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure
- Cases ship standard unfinished

### OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images above))



GIA GELATO - CURVED GLASS					
TECHNICAL FEATURES		MODELS			
		GIA G1150	GIA G1700	GIA G2106	GIA G2106 Dual Temp
External Dimensions (L-D-H)	Inches	45 1/4" - 41 1/2" - 48 3/4"	64 15/16" - 41 1/2" - 48 3/4"	84 5/8" - 41 1/2" - 48 3/4"	84 5/8" - 41 1/2" - 48 3/4"
	MM	1150 - 1055 - 1238	1650 - 1055 - 1238	2150 - 1055 - 1238	2150 - 1055 - 1238
Crated Dimensions (L-D-H)	Inches	52" - 48" - 54"	72" - 48" - 54"	91" - 48" - 54"	91" - 48" - 54"
	MM	1320 - 1219 - 1371	1828 - 1219 - 1371	2311 - 1219 - 1371	2311 - 1219 - 1371
5 Liter Pan Capacity* 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)
8 Liter Pan Capacity* 14 3/16" x 9 13/16" x 3 1/8" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)
12 Liter Pan Capacity* 14 3/16" x 9 13/16" x 6" (360mm x 250mm x 150mm)	Pan Configuration	8	12	16	16 (8 + 8)
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	2 / Hermetic	2 / Hermetic
BTU's @ -25°F Evap Temperature	BTU's	5440 BTU'S	7040 BTU'S	8640 BTU'S	10,880 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)
Power Consumption	(W/A)	1700W / 9A	2200W / 11.5A	2700W / 14A	3000W / 15A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°/°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs	500Kgs / 1102Lbs

\* Dimensions are without side panels

\* Pans not Included

\*\* Note: 6 foot cord supplied requires 208-230V NEMA L14-20P Hard wire option




361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com




# GIA (SQUARE GLASS)

# Gelato Showcase

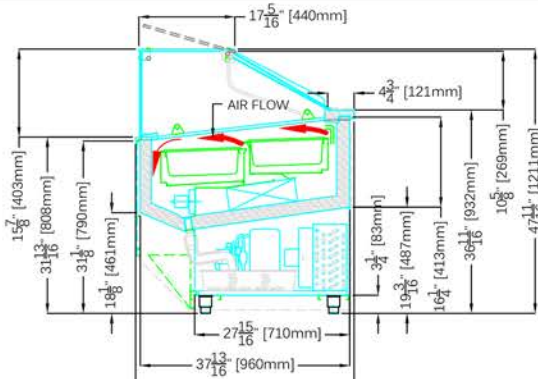

**Note: with casters**  
**Casters height: 4 3/8"H**  
**Overall height: 48 13/16"H**

**OPTIONAL:  
 SHOWN WITH  
 POPSICLE TRAYS**



## STANDARD FEATURES

- LED lighting system
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure
- Cases ship standard unfinished

## OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images above))



GIA GELATO - SQUARE GLASS					
TECHNICAL FEATURES		MODELS			
		GIA G1150	GIA G1700	GIA G2106	GIA G2106 Dual Temp
External Dimensions (L-D-H)	Inches	45 1/4" - 39 7/16" - 47 11/16"	64 15/16" - 39 7/16" - 47 11/16"	84 5/8" - 39 7/16" - 47 11/16"	84 5/8" - 39 7/16" - 47 11/16"
	Inches-MM	1150 - 1002 - 1211	1650 - 1002 - 1211	2150 - 1002 - 1211	2150 - 1002 - 1211
Crated Dimensions (L-D-H)	Inches	52" - 45" - 53"	72" - 45" - 53"	91" - 45" - 53"	91" - 45" - 53"
	Inches-MM	1320 - 1143 - 1346	1828 - 1143 - 1346	2311 - 1143 - 1346	2311 - 1143 - 1346
5 Liter Pan Capacity* 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)
8 Liter Pan Capacity* 14 3/16" x 9 13/16" x 3 1/8" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)
12 Liter Pan Capacity* 14 3/16" x 9 13/16" x 6" (360mm x 250mm x 150mm)	Pan Configuration	8	12	16	16 (8 + 8)
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	2 / Hermetic	2 / Hermetic
BTU's @ -25°F Evaporator Temperature	BTU's	5440 BTU'S	7040 BTU'S	8640 BTU'S	10,880 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)
Power Consumption	(W/A)	1700W / 9A	2200W / 11.5A	2700W / 14A	3000W / 15A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°/°C/°F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs	500Kgs / 1102Lbs

\* Dimensions are without side panels

\* Pans not Included

\*\* Note: 6 foot cord supplied requires 208-230V NEMA L14-20P Hard wire option



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

