

Gia



Best in its class



This robust showcase has the interior of a first class Gelato display. Gia is the only one to have a split deck that allows for best cooling and temperature distribution on both, front and back rows. It has Pyrolytic heated front glass and an angled display with LED lighting as standard.



Discover the Art of Display...


Gia Photos



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com


GIA (CURVED GLASS)

Gelato Showcase

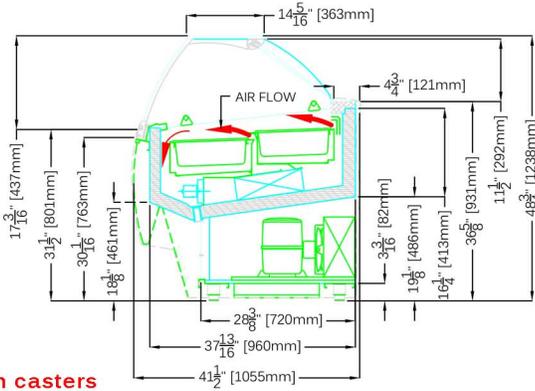

Note: with casters
Casters height: 4 3/8" H
Overall height: 49 7/8" H

**OPTIONAL:
 SHOWN WITH
 POPSICLE TRAYS**



STANDARD FEATURES

- Diffused LED light 3000°K
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure
- Cases ship standard unfinished

OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images above))



GIA CURVED GLASS - GELATO					
TECHNICAL FEATURES		MODELS			
		GIA C G1150 / GIA GEL 12	GIA C G1700 / GIA GEL 18	GIA C G2106 / GIA GEL 24	GIA C G2106 / GIA GEL 24 Dual Temp
External Dimensions (L-D-H)	Inches	*45 1/4" - 41 1/2" - 48 3/4"	*64 15/16" - 41 1/2" - 48 3/4"	*84 5/8" - 41 1/2" - 48 3/4"	*84 5/8" - 41 1/2" - 48 3/4"
	MM	*1150 - 1055 - 1238	*1650 - 1055 - 1238	*2150 - 1055 - 1238	*2150 - 1055 - 1238
Crated Dimensions (L-D-H)	Inches	52" - 48" - 54"	72" - 48" - 54"	91" - 48" - 54"	91" - 48" - 54"
	MM	1320 - 1219 - 1371	1828 - 1219 - 1371	2311 - 1219 - 1371	2311 - 1219 - 1371
5 Liter Pan Capacity** 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)
8 Liter Pan Capacity** 14 3/16" x 9 13/16" x 3 1/8" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)
12 Liter Pan Capacity** 14 3/16" x 9 13/16" x 6" (360mm x 250mm x 150mm)	Pan Configuration	8	12	16	16 (8 + 8)
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	2 / Hermetic	2 / Hermetic
BTU's @ -25°F Evap Temperature	BTU's	5440 BTU'S	7040 BTU'S	8640 BTU'S	10,880 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)
Power Consumption	(W/A)	1700W / 9A	2200W / 11.5A	2700W / 14A	3000W / 15A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°/°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs	500Kgs / 1102Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS ** PANS NOT INCLUDED NOTE: 6 FOOT CORD SUPPLIED REQUIRES 208-230V NEMA L14-20P HARD WIRE OPTION




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com



GIA (SQUARE GLASS)

Gelato Showcase

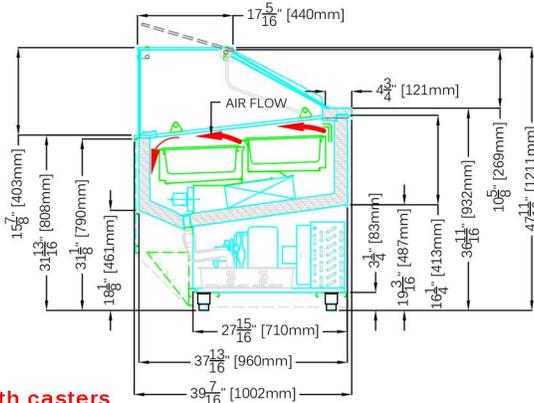

Note: with casters
Casters height: 4 3/8" H
Overall height: 48 13/16" H


STANDARD FEATURES

- Diffused LED light 3000°K
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure
- Cases ship standard unfinished

OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images above))

**OPTIONAL:
 SHOWN WITH
 POPSICLE TRAYS**



GIA SQUARE GLASS - GELATO					
TECHNICAL FEATURES		MODELS			
		GIA SQ G1150 / GIA GEL 12	GIA SQ G1700 / GIA GEL 18	GIA SQ G2106 / GIA GEL 24	GIA SQ G2106 / GIA GEL 24 Dual Temp
External Dimensions (L-D-H)	Inches	*45 1/4" - 39 7/16" - 47 11/16"	*64 15/16" - 39 7/16" - 47 11/16"	*84 5/8" - 39 7/16" - 47 11/16"	*84 5/8" - 39 7/16" - 47 11/16"
	MM	*1150 - 1002 - 1211	*1650 - 1002 - 1211	*2150 - 1002 - 1211	*2150 - 1002 - 1211
Crated Dimensions (L-D-H)	Inches	52" - 45" - 53"	72" - 45" - 53"	91" - 45" - 53"	91" - 45" - 53"
	MM	1320 - 1143 - 1346	1828 - 1143 - 1346	2311 - 1143 - 1346	2311 - 1143 - 1346
5 Liter Pan Capacity** 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)
8 Liter Pan Capacity** 14 3/16" x 9 13/16" x 3 1/8" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)
12 Liter Pan Capacity** 14 3/16" x 9 13/16" x 6" (360mm x 250mm x 150mm)	Pan Configuration	8	12	16	16 (8 + 8)
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	2 / Hermetic	2 / Hermetic
BTU's @ -25°F Evap Temperature	BTU's	5440 BTU'S	7040 BTU'S	8640 BTU'S	10,880 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 208-230/1/60 (USA)	230/1/50 (EU) 208-230/1/60 (USA)	230/1/50 (EU) 208-230/1/60 (USA)	230/1/50 (EU) 208-230/1/60 (USA)
Power Consumption	(W/A)	1700W / 9A	2200W / 11.5A	2700W / 14A	3000W / 15A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs	500Kgs / 1102Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS ** PANS NOT INCLUDED NOTE: 6 FOOT CORD SUPPLIED REQUIRES 208-230V NEMA L14-20P HARD WIRE OPTION



361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com



GIA (SQUARE GLASS)


Deli/Pastry Showcase

STANDARD FEATURES

- Diffused LED light 3000°K
- Lift-up top glass
- Lift-up hydraulic deck for ease of cleaning
- Acrylic sliding doors closure
- Cases ship standard unfinished

OPTIONS

- Glass shelf
- Remote condensing unit
- Roll down night curtain
- RAL color/laminate custom finish
- Dimmer switch
- Casters

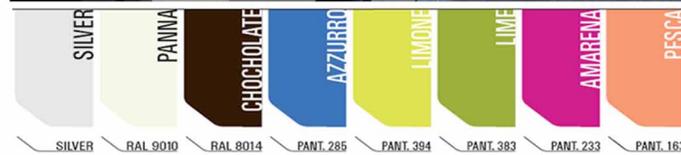

GIA SQUARE GLASS - DELI/PASTRY				
TECHNICAL FEATURES		MODELS		
		GIA SQ DP1150	GIA SQ DP1650	GIA SQ DP2150
External Dimensions (L-D-H)	Inches	*45 1/4" - 39 13/16" - 48 7/8"	*64 15/16" - 39 13/16" - 48 7/8"	*84 5/8" - 39 13/16" - 48 7/8"
	Inches-MM	*1150 - 1011 - 1242	*1650 - 1011 - 1242	*2150 - 1011 - 1242
Crated Dimensions (L-D-H)	Inches	52" - 48" - 54"	72" - 48" - 54"	91" - 48" - 54"
	Inches-MM	1320 - 1219 - 1371	1828 - 1219 - 1371	2311 - 1219 - 1371
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck
Operating Temperature	°C / °F	4°C / 39°F	4°C / 39°F	4°C / 39°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap Temperature (Chocolate: +35°F Evap Temp)	BTU's	1350 BTU'S	1945 BTU'S	2450 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)	230/1/50 (EU) 208-220/1/60 (USA)
Power Consumption	(W/A)	565W / 3.5A	680W / 4A	885W / 4.5A
Defrost	Mode/Type	Automatic	Automatic	Automatic
Climatic Class	N°/°C/F°/H.R.	4/30/86/55%	4/30/86/55%	4/30/86/55%
Refrigerant Gas	Type	R404A	R404A	R404A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs


* DIMENSIONS ARE WITHOUT SIDE PANELS

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



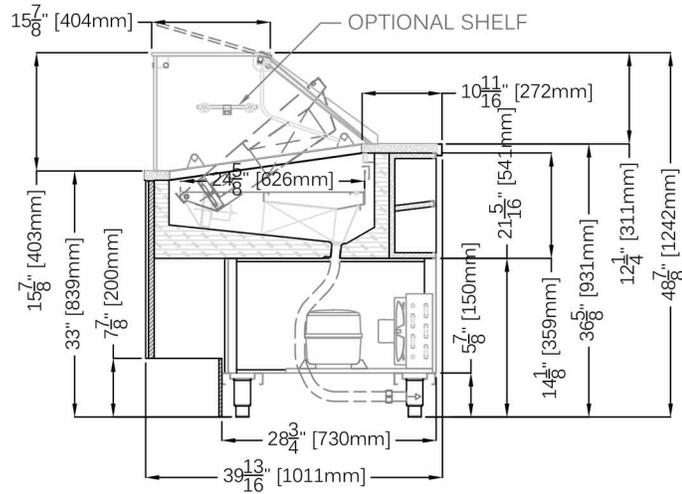


PLAN VIEWS

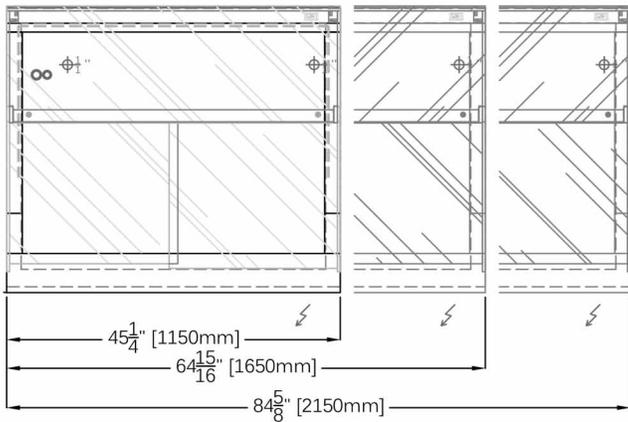


ELECTRICAL LEGEND	
	REFRIGERATED LINES
	DRAIN
	POWER

REAR ELEVATIONS (OPERATOR SIDE)

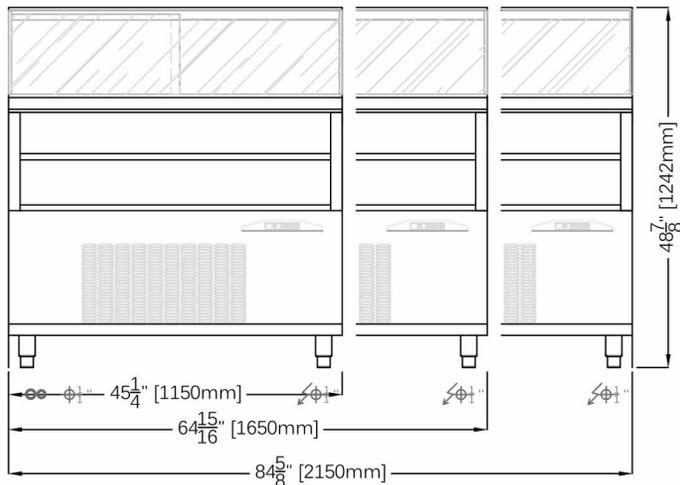

FRONT ELEVATIONS (CUSTOMER SIDE)

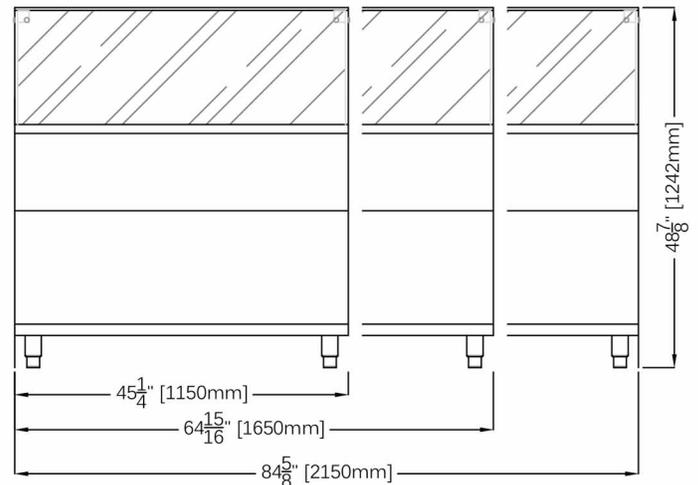

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.