



GIA (SQUARE GLASS)

Gelato Showcase

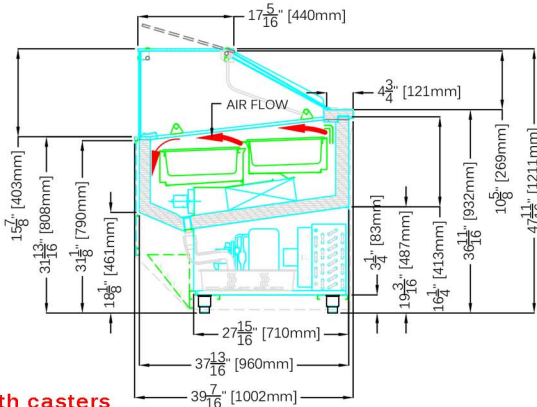

Note: with casters
Casters height: 4 3/8" H
Overall height: 48 13/16" H

**OPTIONAL:
 SHOWN WITH
 POPSICLE TRAYS**



STANDARD FEATURES

- Diffused LED light 3000°K
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure
- Cases ship standard unfinished

OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images above))



GIA SQUARE GLASS - GELATO					
TECHNICAL FEATURES		MODELS			
		GIA SQ G1150 / GIA GEL 12	GIA SQ G1700 / GIA GEL 18	GIA SQ G2106 / GIA GEL 24	GIA SQ G2106 / GIA GEL 24 Dual Temp
External Dimensions (L-D-H)	Inches	*45 1/4" - 39 7/16" - 47 11/16"	*64 15/16" - 39 7/16" - 47 11/16"	*84 5/8" - 39 7/16" - 47 11/16"	*84 5/8" - 39 7/16" - 47 11/16"
	MM	*1150 - 1002 - 1211	*1650 - 1002 - 1211	*2150 - 1002 - 1211	*2150 - 1002 - 1211
Crated Dimensions (L-D-H)	Inches	52" - 45" - 53"	72" - 45" - 53"	91" - 45" - 53"	91" - 45" - 53"
	MM	1320 - 1143 - 1346	1828 - 1143 - 1346	2311 - 1143 - 1346	2311 - 1143 - 1346
5 Liter Pan Capacity** 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)
8 Liter Pan Capacity** 14 3/16" x 9 13/16" x 3 1/8" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)
12 Liter Pan Capacity** 14 3/16" x 9 13/16" x 6" (360mm x 250mm x 150mm)	Pan Configuration	8	12	16	16 (8 + 8)
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	2 / Hermetic	2 / Hermetic
BTU's @ -25°F Evap Temperature	BTU's	5440 BTU'S	7040 BTU'S	8640 BTU'S	10,880 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 208-230/1/60 (USA)	230/1/50 (EU) 208-230/1/60 (USA)	230/1/50 (EU) 208-230/1/60 (USA)	230/1/50 (EU) 208-230/1/60 (USA)
Power Consumption	(W/A)	1700W / 9A	2200W / 11.5A	2700W / 14A	3000W / 15A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R452A	R452A	R452A	R452A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs	500Kgs / 1102Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS ** PANS NOT INCLUDED NOTE: 6 FOOT CORD SUPPLIED REQUIRES 208-230V NEMA L14-20P HARD WIRE OPTION



361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com

