



# MURO H12 HOT (DRY)

## Self Serve Air Screen Showcase

### MURO SQUARE PROFILE MATCHES WITH SQUARE CASE MODELS

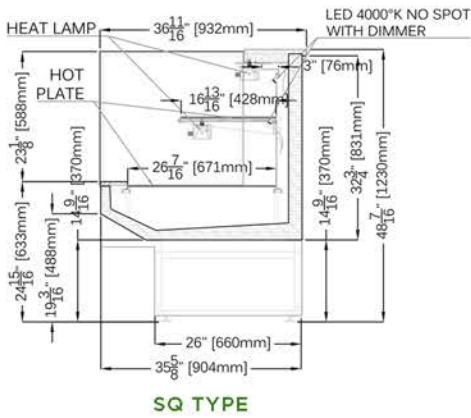

### CURVE PROFILE OPTION MATCHES CURVED CASE MODELS

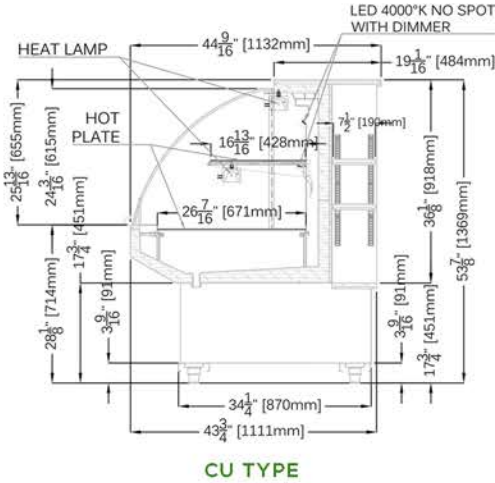

### STANDARD FEATURES

- Double pane side glass ends
- LED lighting
- Dixell digital control
- Stainless steel shelves with heated deck plates
- Stainless steel foam in place bottom and top
- Adjustable feet
- Case ship standard white HPL finish

### OPTIONS

- Convection heat/fan
- Curved profile matches curved case models
- Stainless steel side panels in lieu of glass
- Roll down locking shutter
- Shelf fence for inclined position
- Epoxy RAL color interior
- RAL color/laminate front and side panels
- Casters

### MURO H12 HOT (DRY) SELF SERVE

TECHNICAL FEATURES		MODELS				
		MURO H12 HOT 1000	MURO H12 HOT 1300	MURO H12 HOT 1500	MURO H12 HOT 1700	MURO H12 HOT 2000
External Dimensions (L-D-H)	Inches	* 39 3/8" - 35 5/8" - 48 7/16"	* 51 3/16" - 35 5/8" - 48 7/16"	* 59 1/16" - 35 5/8" - 48 7/16"	* 66 15/16" - 35 5/8" - 48 7/16"	* 78 3/4" - 35 5/8" - 48 7/16"
Inches-MM	MM	1000 - 904 - 1230	1300 - 904 - 1230	1500 - 904 - 1230	1700 - 904 - 1230	2000 - 904 - 1230
Crated Dimensions (L-D-H)	Inches	46" - 41" - 55"	57" - 41" - 56"	66" - 41" - 55"	73" - 41" - 55"	84" - 41" - 55"
Inches-MM	MM	1168 - 1041 - 1397	1447 - 1041 - 1397	1676 - 1041 - 1397	1854 - 1041 - 1397	2133 - 1041 - 1397
Power Supply	(V)	208-220V	208-220V	208-220V	208-220V	208-220V
Power Consumption	(W)	2000W	2500W	2600W	2800W	2900W
Operating Temperature	°F	177°F	177°F	177°F	177°F	177°F
Net Weights	Kg/Lb	130Kgs / 286Lbs	200Kgs / 440Lbs	240Kgs / 528Lbs	240Kgs / 528Lbs	300Kgs / 660Lbs
Crated Weights	Kg/Lb	145Kgs / 319Lbs	220Kgs / 484Lbs	255Kgs / 561Lbs	255Kgs / 561Lbs	330Kgs / 726Lbs

\* Dimensions are without side panels

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

