



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____



Photo shown with standard polished stainless steel interior and exterior.



Visit our website for more finishing options and RAL colors www.oscartek.com



Photo shown with optional top glass with shelf – Combi with optional RAL color front finish

OPTIMA

Self-Serve Air Screen Refrigeration Showcase

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500

STANDARD FEATURES

- Standard 34”H, 30”D
- Double pane glass ends
- Dixell digital control
- Bottom evaporator ventilation cooling
- Stainless steel foam in place bottom and top
- Adjustable feet
- Roll down night curtain
- Open back shelving
- Cases ship standard polished stainless steel interior and exterior

OPTIONS

- Available in 34”H, narrow depth 26”D
- Available in 34”H, 30”D with top glass and shelf – Combi. Total height 50”H
- Available in 34”H with night shutter
- Available in 32 1/2”H with legs and 32 3/8”H with casters to fit case under 34”H counter by customers (30”D, narrow 26”D)
- Available in 32 1/2”H with legs and 32 3/8”H with casters (top glass with shelf – Combi). Total height 48 3/8”H
- Stainless steel side panels in lieu of glass
- Black/white interior
- Remote/water cooled condensing unit
- RAL color/laminate front and side panels
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com





Project Name: _____
 Item #: _____ Quantity: _____


OPTIMA - 34" H

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500


STANDARD

PLAN VIEWS

OPTIMA 1000



OPTIMA 1250

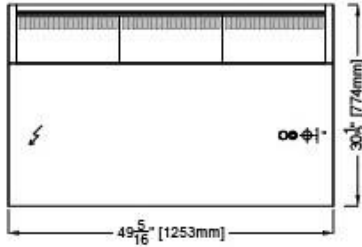


OPTIMA 1500




REAR ELEVATIONS (OPERATOR SIDE):


OPTIMA 1000



OPTIMA 1250

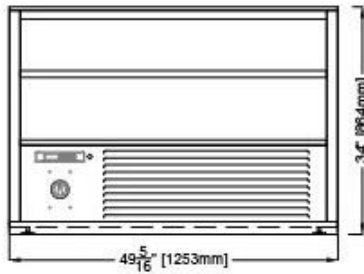

OPTIMA 1500

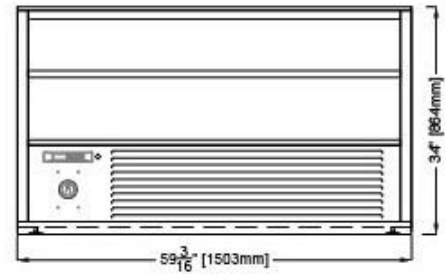

ELECTRICAL LEGEND

∞	REFRIGERATION LINES
Φ 1"	DRAIN
⚡	POWER

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 650.342.2400 | Fax: 650.342.7400
 www.oscartek.com




OPTIMA - 34" H

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500

STANDARD: 30" D


SECTION VIEW

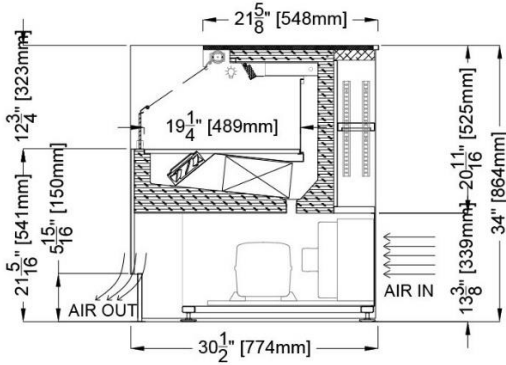


OPTIONALS

SECTION VIEWS


NARROW - 26" D

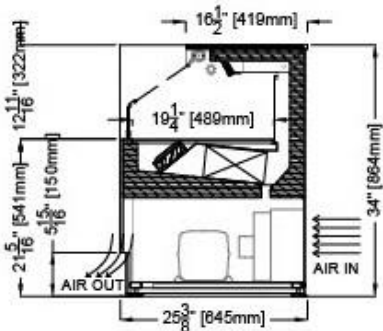

COMBI

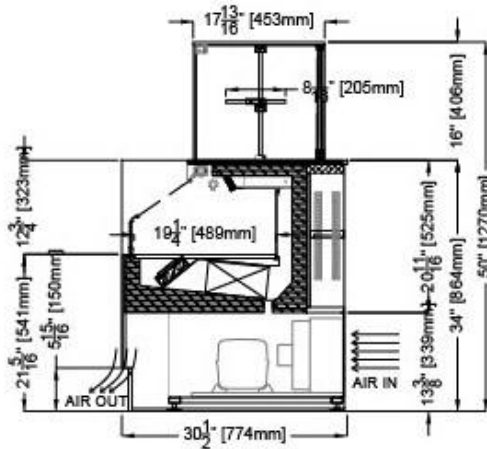

NIGHT SHUTTER

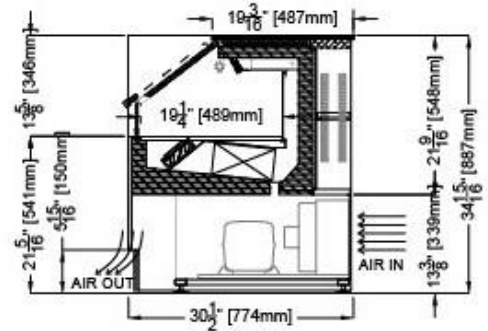


*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OPTIONAL: OPTIMA – 32-1/2”H


MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500

**OPTIONALS
SECTION VIEWS**


STANDARD 30”D W/ LEGS

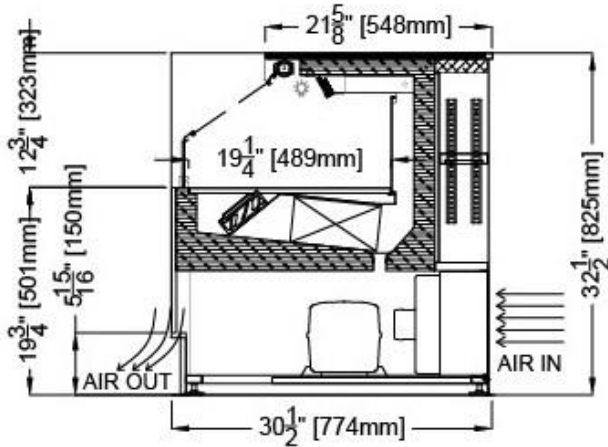


STANDARD 30”D W/ CASTERS

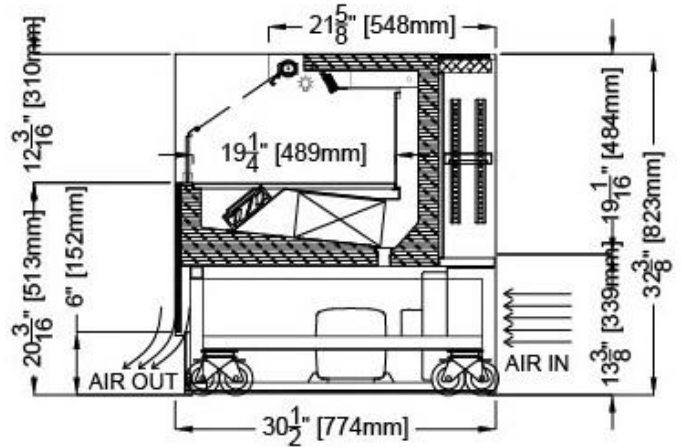

NARROW 26”D W/ LEGS

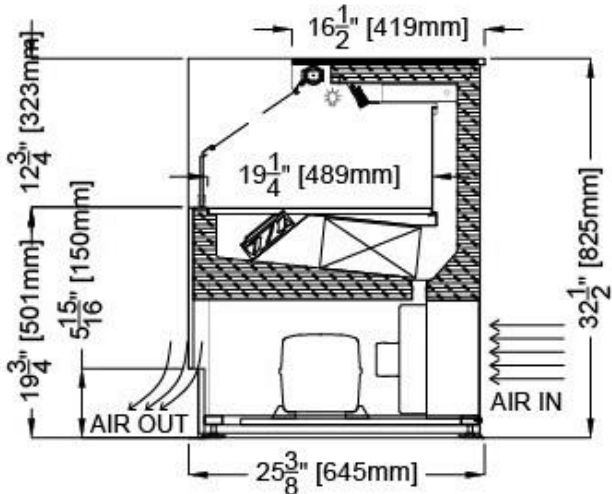

NARROW 26”D W/ CASTERS

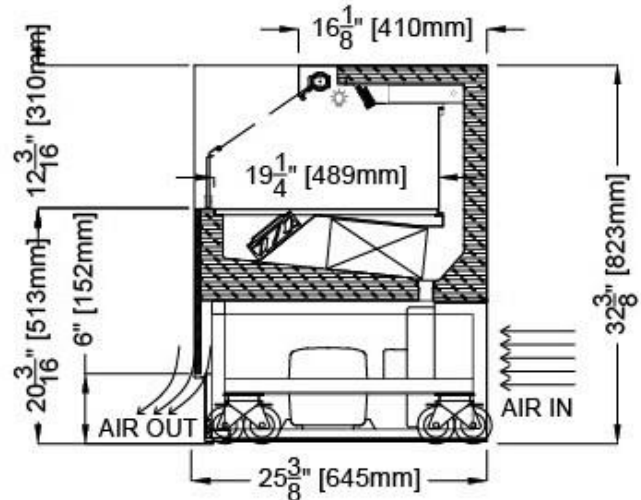


*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OPTIONAL: OPTIMA – 32-1/2”H


MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500

**OPTIONALS
SECTION VIEWS**

COMBI W/ LEGS

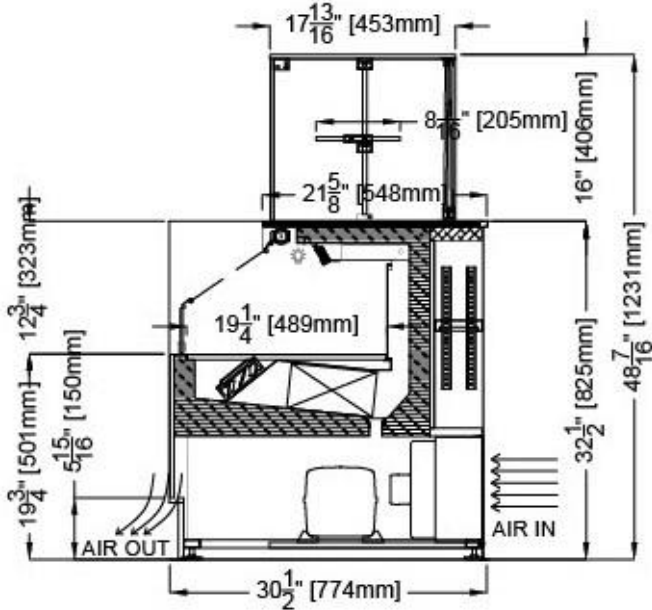

COMBI W/ CASTERS

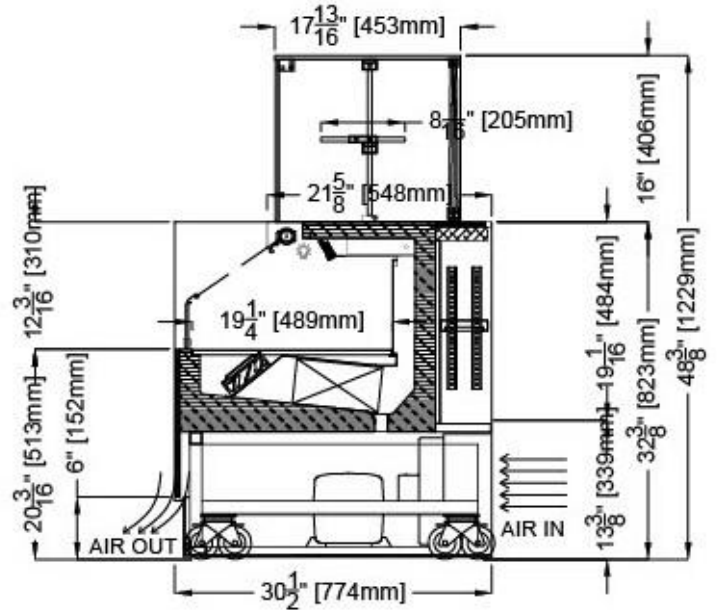

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

OPTIMA - 34"H

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500

OPTIMA - SELF SERVE REFRIGERATION				
TECHNICAL FEATURES		MODELS		
		OPTIMA 1000 (MUROOP39F)	OPTIMA 1250 (MUROOP49F)	OPTIMA 1500 (MUROOP59F)
External Dimensions (L-D-H) Inches-MM	Inches MM	*39 1/2" - 30 1/2" - 34" *1003 - 775 - 864	*49 5/16" - 30 1/2" - 34" *1253 - 775 - 864	*59 3/16" - 30 1/2" - 34" *1503 - 775 - 864
Crated Dimensions (L-D-H) Inches-MM	Inches MM	46" - 37" - 40" 1168 - 939 - 1016	55" - 37" - 40" 1397 - 939 - 1016	66" - 37" - 40" 1676 - 939 - 1016
BTU's @ +14°F Evap Temperature	BTU'S	3600	4500	5100
Electric Supply	(V/Ph/Hz)	208-220V/60Hz	208-220V/60Hz	208-220V/60Hz
Power Consumption	(W/A)	1500/7.5	1850/8.9	2000/10.5
Operating Temperature	°F	40°F	40°F	40°F
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	1/2" Suction, 1/4" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	290	350	400
Crated Weights	Lb	370	430	480
* DIMENSIONS ARE WITH POLISHED S/S SIDES				
NOTES:				
1) 85°F AMBIENT AND 55% RELATIVE HUMIDITY 2) FLOOR SINK RECOMMENDED ON THESE MODELS				

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

