
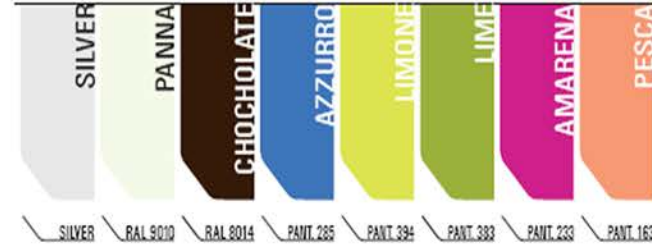
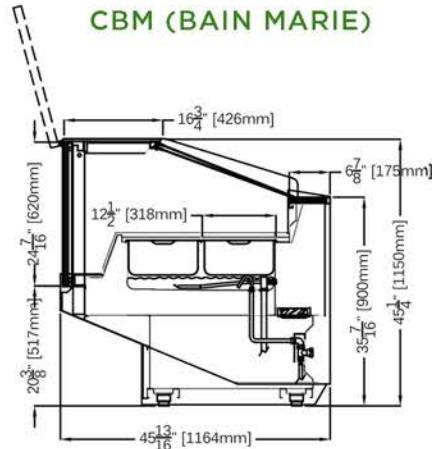


PERFORMER

Hot Showcase

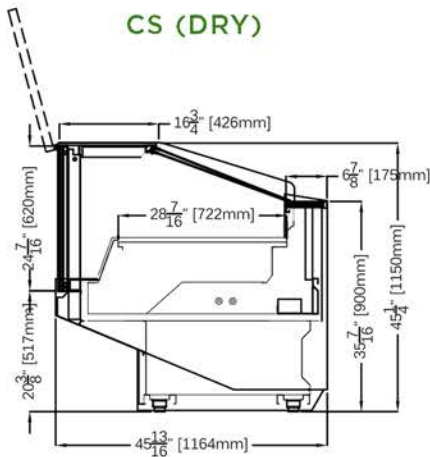

STANDARD FEATURES

- Double pane lift-up front glass
- Double pane sides
- LED lighting
- Plexiglass sliding doors
- Cases ship standard unfinished

OPTIONS

- Bumper addition for cart/trolley
- Rolling curtain
- Paper holder
- Pull-out faucet inside the tank
- Cutting board with knives pocket
- Scale holder
- Intermediate shelf
- Casters

PERFORMER HOT (CS - DRY)				
TECHNICAL FEATURES		MODELS		
		PERFORMER PCS1150	PERFORMER PCS1650	PERFORMER PCS2150
External Dimensions (L-D-H)	Inches	45 1/4" - 45 13/16" - 45 1/4"	64 15/16" - 45 13/16" - 45 1/4"	84 5/8" - 45 13/16" - 45 1/4"
	Inches-MM	1150 - 1164 - 1150	1650 - 1164 - 1150	2150 - 1164 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"
	Inches-MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2370 - 1370 - 1400
Heating System	Type	Dry	Dry	Dry
Operating Temperature	°C / °F	80°C / 176°F	80°C / 176°F	80°C / 176°F
		230/1/50 (UE)	230/1/50 (UE)	230/1/50 (UE)
Electric Supply	(V/Ph/Hz)	208-220/1/60 (USA)	208-220/1/60 (USA)	208-220/1/60 (USA)
Power Consumption	(W/A)	2050W / 9A	3050W / 13A	4050 / 18A
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs

* Dimensions are without side panels

PERFORMER HOT (CBM - BAIN MARIE)				
TECHNICAL FEATURES		MODELS		
		PERFORMER PCBM1150	PERFORMER PCBM1650	PERFORMER PCBM2150
External Dimensions (L-D-H)	Inches	45 1/4" - 45 13/16" - 45 1/4"	64 15/16" - 45 13/16" - 45 1/4"	84 5/8" - 45 13/16" - 45 1/4"
	Inches-MM	1150 - 1164 - 1150	1650 - 1164 - 1150	2150 - 1164 - 1150
Crated Dimensions (L-D-H)	Inches	53 7/8" - 53 7/8" - 55 1/8"	73 5/8" - 53 7/8" - 55 1/8"	93 1/4" - 53 7/8" - 55 1/8"
	Inches-MM	1370 - 1370 - 1400	1870 - 1370 - 1400	2370 - 1370 - 1400
Heating System	Type	Bain Marie	Bain Marie	Bain Marie
Operating Temperature	°C / °F	80°C / 176°F	80°C / 176°F	80°C / 176°F
		230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)
Electric Supply	(V/Ph/Hz)	208-220/1/60 (USA)	208-220/1/60 (USA)	208-220/1/60 (USA)
Power Consumption	(W/A)	2050W / 9A	3050W / 13A	4050 / 18A
Net Weights	Kg/Lb	200Kgs / 440Lbs	290Kgs / 639Lbs	330Kgs / 727Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	435Kgs / 959Lbs	510Kgs / 1124Lbs

* Dimensions are without side panels



361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com

