



STANDARD FEATURES

- Energy efficient air cooled condensing unit
- One piece molded body using 3' ecologic polyurethane insulation
- High performance
- Static refrigeration with embedded coil and thermostatic valve
- Climate class 4 (+86°F/55% R.H.)
- AISI304 stainless steel external finish top and back stainless interior
- Ecological polyurethane foam insulation
- Stainless steel scotch brite adjustable feet, gray steel frame support
- Digital control panel
- Flexible arrangement can be multiplexed and customized to fit customer layout
- Cases ship standard unfinished

OPTIONS

- Sneeze guard
- 24Ooz. stainless steel container; Stainless steel cylindrical containers dim. Ø 7 1/2"-9 3/4"H.
- Approximately 7 liters
- Water cooled condensing system
- Remote condensing unit
- Electric heated condensate pan
- Custom front and side paneling
- Stainless steel scoop washer with fixed water tap
- Reinforced wood crate
- Casters



POZZETTI WITHOUT STORAGE

TECHNICAL FEATURES		MODELS					
		POZZETTI P2	POZZETTI P4	POZZETTI P6	POZZETTI P8	POZZETTI P10	POZZETTI P12
External dimensions (L-D-H)	Inches	19 11/16" - 25 13/16" - 36 5/8"	29 1/2" - 25 13/16" - 36 5/8"	39 3/8" - 25 13/16" - 36 5/8"	49 3/16" - 25 13/16" - 36 5/8"	59 3/8" - 25 13/16" - 36 5/8"	78 3/4" - 25 13/16" - 36 5/8"
	Inches-MM	500 - 655 - 931	750 - 655 - 931	1000 - 655 - 931	1250 - 655 - 931	1507 - 655 - 931	2000 - 655 - 931
Crated dimensions (L-D-H)	Inches	25" - 31" - 42"	35" - 31" - 42"	45" - 31" - 42"	55" - 31" - 42"	65" - 31" - 42"	85" - 31" - 42"
	Inches	635 - 787 - 1066	889 - 787 - 1066	1143 - 787 - 1066	1397 - 787 - 1066	1651 - 787 - 1066	2159 - 787 - 1066
Refrigeration	Type	Static	Static	Static	Static	Static	Static
No. of Containers (240 oz.)	#	2	4	6	8	10	12
Compressor	Nr./Type	1	1	1	1	1	1 (2)
Compressor	(Pw-HP)	230-1/3	230-1/3	310-5/8	310-5/8	310-5/8	310-5/8
BTU's @ -25°F Evap	BTU'S	832 BTU'S	1280 BTU'S	2048 BTU'S	2528 BTU'S	3200 BTU'S	4096 BTU'S
Power Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60 (2)
Electrical Input (standard)	(W/A)	5.1A	5.2A	7.3A	7.5A	7.7A	7.3A (2)
Defrost	Mode/Type	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle	Off-Cycle
Climatic Class	N°/C°/F°/H.R.	4	4	4	4	4	4
Operating Conditions	---	55	55	55	55	55	55
Refrigerant	Type	R404A	R404A	R404A	R404A	R404A	R404A
Net Weights	Lb	200Lbs	260Lbs	330Lbs	419Lbs	508Lbs	660Lbs
Crated Weights	Lb	350Lbs	469Lbs	573Lbs	694Lbs	764Lbs	1146Lbs

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com







STANDARD SIDE VIEW




OPTIONAL: SNEEZE GUARD SIDE VIEW

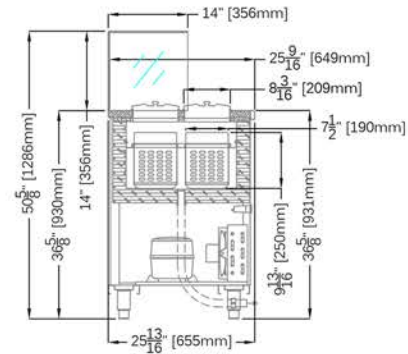

PLAN VIEWS

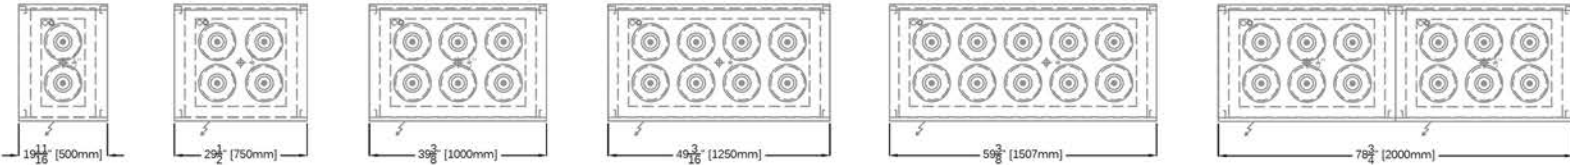

REAR ELEVATION (OPERATOR SIDE)

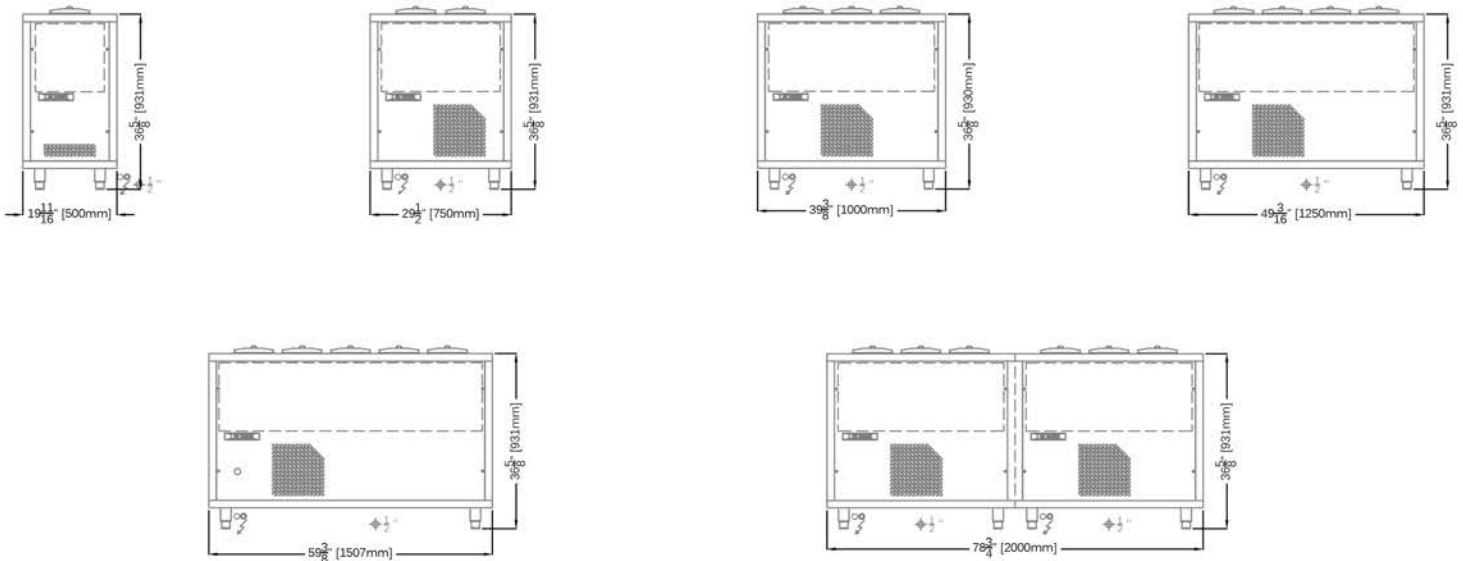

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com

