

PROVINO I FROZEN

MODELS: PROVINO I G700, G1400, G2100

STANDARD FEATURES

- Solid Side
- Dual Medium Temperature Version with intermediate double glass divider
- Triple pane glass premium door
- Steel load bearing structure
- 3000°K LED lighting with dimmer switch
- Touch Control
- Ventilated cooling
- interior vertical shelf support in stainless steel
- adjustable feet
- standard steel 304A
- stainless steel interior and exterior
- Stainless steel shelves adjustable in height on racks
- programmed automatic electric defrost
- Approvals: cETLus, ETL sanitation, certified CE
- Self-contained
- Condensate evaporator pan




Provino I Frozen with optional glass side

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)



Examples of optional 6mm thick stone back panel behind shelf. For full selection see our Materials Brochure.

OPTIONS

- RAL Color Option powder coated door handles exterior and interior over stainless steel
- 6mm thick stone back panel behind shelf
- Front wood laminate door and handles
- interior shelf trim
- 6mm thick stone back panel behind shelf
- Glass Sides
- Sliding Doors
- Front wood laminate storage doors finish on base
- top door and interior shelf trim
- Top door
- door locks
- Remote application
- Top mounted condensing unit
- water cooled
- central refrigeration rack
- 60 Hz components UL
- Narrow Depth
- Front breathing available in 1400 - 2800 models

**Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®




512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com




MODELS: PROVINO I G700, G1400, G2100

PROVINO I
PLAN VIEWS

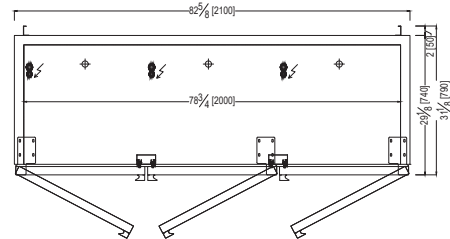

ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

REAR ELEVATIONS (OPERATOR SIDE)

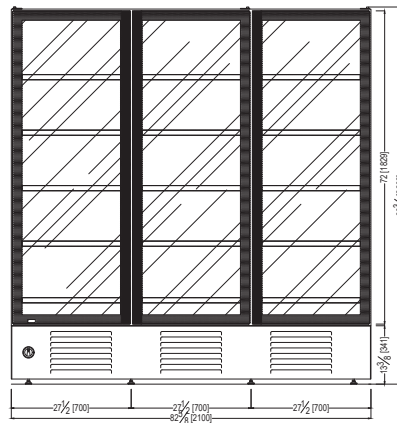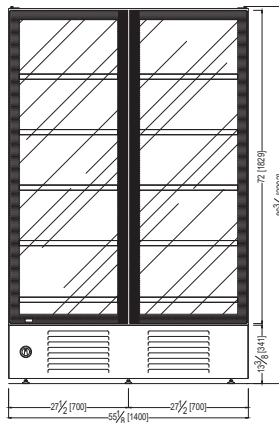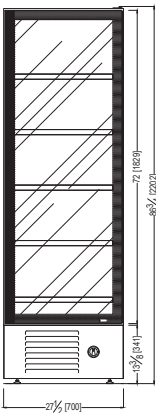

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.


OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




MODELS: PROVINO I G700, G1400, G2100

**PROVINO I - STANDARD DEPTH
SECTION VIEWS**


**STANDARD:
SELF-CONTAINED**

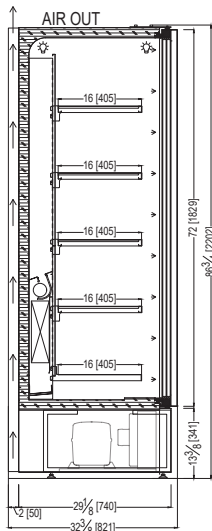


**OPTIONAL:
GLASS SIDE**

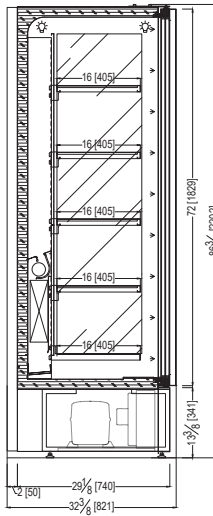


**STANDARD:
REMOTE**

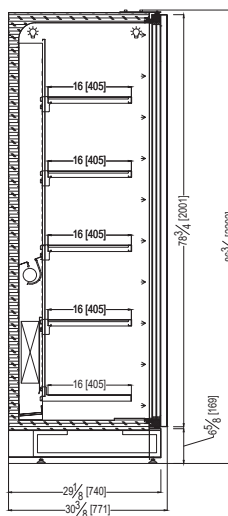

**OPTIONAL:
TOP MOUNTED
CONDENSING UNIT**

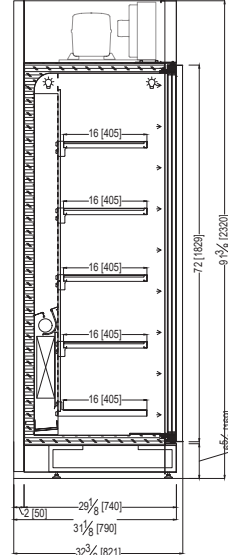


**OPTIONAL:
SLIDING DOORS
ONLY IN SOLID SIDES AND
2100, 2800 MODELS**

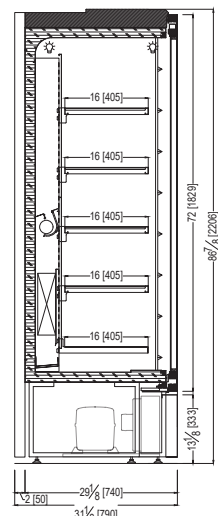


**PROVINO I - NARROW DEPTH
SECTION VIEWS**


**STANDARD:
SELF-CONTAINED**

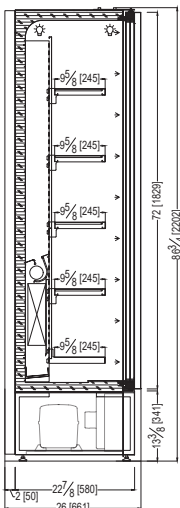


**OPTIONAL:
GLASS SIDE**

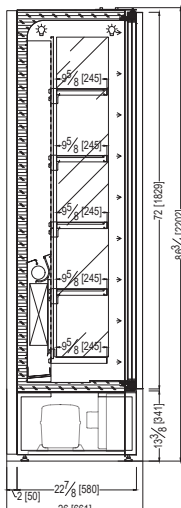


**STANDARD:
REMOTE**

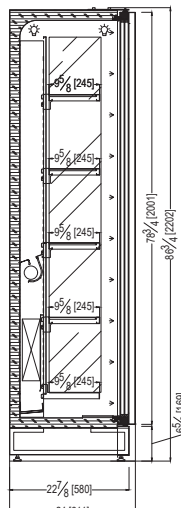

**OPTIONAL:
TOP MOUNTED
CONDENSING UNIT**

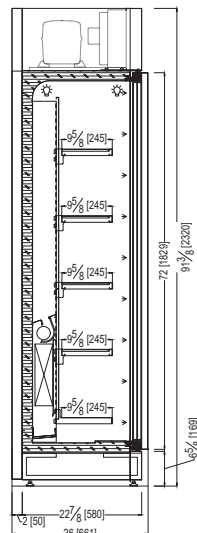

**OPTIONAL:
SLIDING DOORS
ONLY IN SOLID SIDES AND
2100, 2800 MODELS**

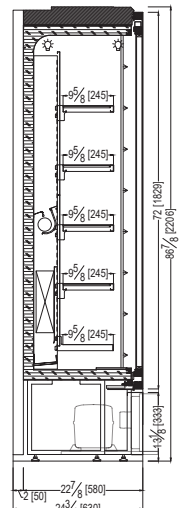

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

MODELS: PROVINO I G700, G1400, G2100

PROVINO I FROZEN - SELF CONTAINED				
TECHNICAL FEATURES		MODELS		
Model Name (Model ETL Code)		PROVINO I G700 (GIAGEL12)	PROVINO I G1400 (GIAGEL18)	PROVINO I G2100 (GIAGEL24)
External Dimensions (L-D-H)	Inches	*27 1/2" - 32 3/8" - 86 3/4"	*55 1/8" - 32 3/8" - 86 3/4"	*82 5/8" - 32 3/8" - 86 3/4"
Inches-MM	MM	*700 - 821 - 2022	*1400 - 821 - 2022	*2100 - 821 - 2022
Crated Dimensions (L-D-H)	Inches	35" - 39" - 98"	63" - 39" - 98"	90" - 39" - 98"
Inches-MM	MM	880 - 970 - 2470	1580 - 970 - 2470	2280 - 970 - 2470
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck
Number of Glass Doors	#	1	2	3
Operating Temperature	°F	0°F to 5°F	0°F to 5°F	0°F to 5°F
Condensing Units	#	1	2	3
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60
Power Consumption	(W/A)	1300/8.9	2400/16.5	3600/24.5
Defrost	Mode/Type	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290
Net Weights	Lb	353	617	816
Crated Weights	Lb	413	677	876

*DIMENSIONS WITH POLISHED S/S SIDES

PROVINO I FROZEN - REMOTE				
TECHNICAL FEATURES		MODELS		
Model Name (Model Code)		PROVINO I G700 (GIAGEL12)	PROVINO I G1400 (GIAGEL18)	PROVINO I G2100 (GIAGEL24)
External Dimensions (L-D-H)	Inches	*27 1/2" - 30 3/8" - 86 3/4"	*55 1/8" - 30 3/8" - 86 3/4"	*82 5/8" - 30 3/8" - 86 3/4"
Inches-MM	MM	*700 - 771 - 2022	*1400 - 771 - 2022	*2100 - 771 - 2022
Crated Dimensions (L-D-H)	Inches	35" - 39" - 98"	63" - 39" - 98"	90" - 39" - 98"
Inches-MM	MM	880 - 970 - 2470	1580 - 970 - 2470	2280 - 970 - 2470
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck
Number of Glass Doors	#	1	2	3
Operating Temperature	°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F
Condensing Units	#	1	2	3
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ -31°F Evap Temperature	BTU/H	2730	4610	6150
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60
Power Consumption	(W/A)	1300/8.9	2400/16.5	3600/24.5
Defrost	Mode/Type	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R452A	R452A	R452A
Pipe Size (Suction-Liquid)	(INCHES)	45/64" - 25/64"	55/64" - 25/64"	55/64" - 15/32"
Net Weights	Lb	353	617	816
Crated Weights	Lb	413	677	876

*DIMENSIONS WITH POLISHED S/S SIDES

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

