



Provino II Deli/Pastry

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

# PROVINO II DELI PASTRY

**MODELS:** PROVINO II DP700, DP800, DP1390, DP1390-2T, DP2075

## STANDARD FEATURES

- Glass sides and back
- Dual Medium Temperature Version with intermediate double glass divider
- Triple pane glass premium door
- Steel load bearing structure
- 3000°K LED lighting with dimmer switch
- Touch Control
- Ventilated cooling
- interior vertical shelf support in stainless steel
- adjustable feet
- standard steel 304A
- stainless steel interior and exterior
- Glass shelves adjustable in height on racks (7 shelves included per door)
- programmed automatic electric defrost
- Approvals: cETLus, ETL sanitation, certified CE
- Self-contained
- Condensate evaporator pan

## OPTIONS


- RAL Color Option powder coated door handles exterior and interior over stainless
- Front wood laminate door and handles
- interior shelf trim
- Front wood laminate storage doors finish on base
- top door and interior shelf trim
- Top door
- door locks
- Remote application
- Top mounted condensing unit
- water cooled
- central refrigeration rack
- 60 Hz components UL
- 6mm thick stone back panel behind shelf
- Narrow Depth
- front breathing available for 1400 - 2800 models
- Heated glass
- Solid sides & back

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com


**MODELS:** PROVINO II DP700, DP800, DP1390, DP1390-2T, DP2075

## PROVINO II PLAN VIEWS

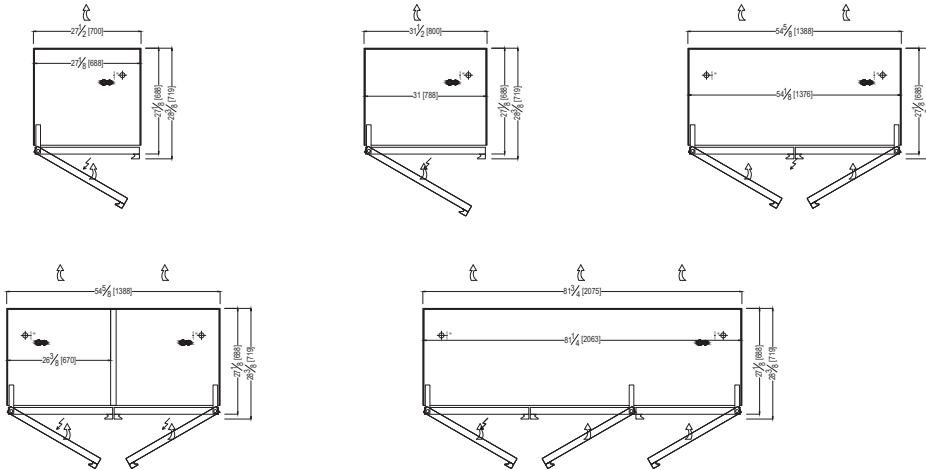

| ELECTRICAL LEGEND                                                                   |                     |
|-------------------------------------------------------------------------------------|---------------------|
|  | REFRIGERATION LINES |
|  | DRAIN               |
|  | POWER               |

## PROVINO II REAR ELEVATIONS (OPERATOR SIDE)

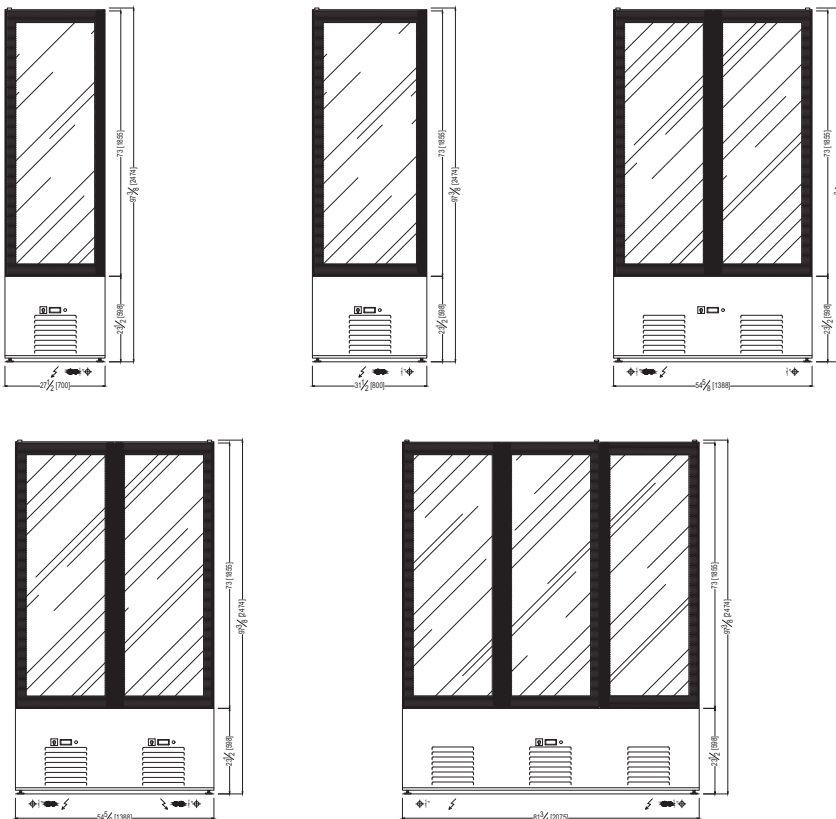

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com




**MODELS:** PROVINO II DP700, DP800, DP1390, DP1390-2T, DP2075

## PROVINO II SECTION VIEWS

**STANDARD:  
SELF-CONTAINED**

**STANDARD:  
REMOTE WITH  
VERTICAL SHELVES**

**OPTIONAL:  
TOP MOUNTED  
CONDENSING UNIT**

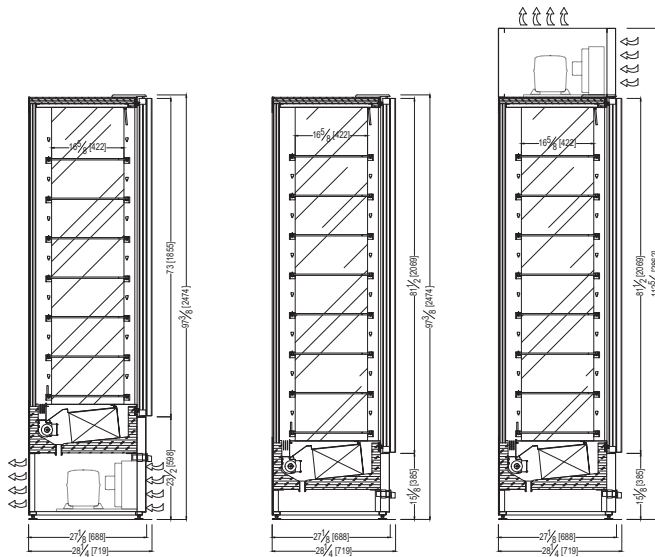


## PROVINO II - WITH FRONT AND REAR DOORS SECTION VIEWS

**OPTIONAL:  
TOP MOUNTED  
CONDENSING UNIT**

**STANDARD:  
REMOTE**

**STANDARD:  
SELF-CONTAINED**

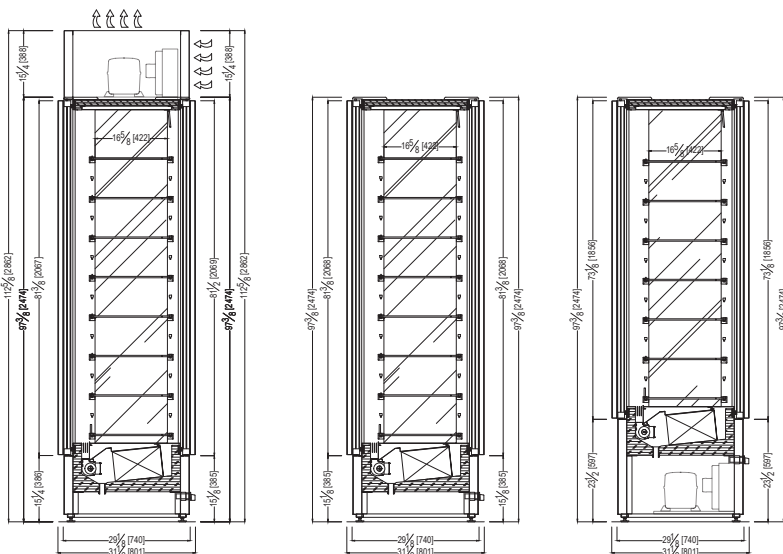

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com



Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

Discover the Art of Display...

**MODELS: PROVINO II DP700, DP800, DP1390, DP1390-2T, DP2075**

| PROVINO II DELI PASTRY - SELF CONTAINED |           |                                 |                                 |                                  |                                       |                                  |
|-----------------------------------------|-----------|---------------------------------|---------------------------------|----------------------------------|---------------------------------------|----------------------------------|
| TECHNICAL FEATURES                      |           | MODELS                          |                                 |                                  |                                       |                                  |
| Model Name<br>(Model Code)              |           | PROVINO II DP700<br>(PROVINO1P) | PROVINO II DP800<br>(PROVINO1P) | PROVINO II DP1390<br>(PROVINO2P) | PROVINO II DP1390-2T<br>(PROVINO1P)X2 | PROVINO II DP2075<br>(PROVINO3P) |
| External Dimensions (L-D-H)             | Inches    | *27 1/2" - 28 1/4" - 97 3/8"    | *31 1/2" - 28 1/4" - 97 3/8"    | *54 5/8" - 28 1/4" - 97 3/8"     | *82 5/8" - 28 1/4" - 97 3/8"          | *81 3/4" - 28 1/4" - 97 3/8"     |
| Inches-MM                               | MM        | *700 - 719 - 2474               | *800 - 719 - 2474               | *1388 - 719 - 2474               | *1388 - 719 - 2474                    | *2075 - 719 - 2474               |
| Crated Dimensions (L-D-H)               | Inches    | 35" - 35" - 108"                | 38 3/5" - 35" - 108"            | 61 4/5" - 35" - 108"             | 62 4/5" - 35" - 108"                  | 88 4/5" - 35" - 108"             |
| Inches-MM                               | MM        | 880 - 870 - 2744                | 980 - 870 - 2745                | 1570 - 870 - 2746                | 1570 - 870 - 2746                     | 2255 - 870 - 2748                |
| Refrigeration                           | Type      | Fan - Ventilated                | Fan - Ventilated                | Fan - Ventilated                 | Fan - Ventilated                      | Fan - Ventilated                 |
| Refrigeration Display Area              | Type      | Deck                            | Deck                            | Deck                             | Deck                                  | Deck                             |
| Number of Glass Doors                   | #         | 1                               | 2                               | 2                                | 3                                     | 4                                |
| Operating Temperature                   | °F        | 32°F to 41°F                    | 32°F to 41°F                    | 32°F to 41°F                     | 32°F to 41°F                          | 32°F to 41°F                     |
| Condensing Units                        | #         | 1                               | 2                               | 2                                | 3                                     | 4                                |
| Compressor                              | Nr./Type  | 1 / Hermetic                    | 1 / Hermetic                    | 1 / Hermetic                     | 1 / Hermetic                          | 2 / Hermetic                     |
| Electric Supply                         | (V/Ph/Hz) | 220/1/60                        | 220/1/60                        | 220/1/60                         | (2) 220/1/60                          | 220/1/60                         |
| Power Consumption                       | (W/A)     | 700/3.8                         | 700/3.8                         | 1360/7.6                         | (2) 680/3.6                           | 1970/11.1                        |
| Defrost                                 | Mode/Type | Automatic                       | Automatic                       | Automatic                        | Automatic                             | Automatic                        |
| Climatic Class                          | *F/%RH    | 75°F-55%RH                      | 75°F-55%RH                      | 75°F-55%RH                       | 75°F-55%RH                            | 75°F-55%RH                       |
| Refrigerant Gas                         | Type      | R290                            | R290                            | R290                             | R290                                  | R291                             |
| Net Weights                             | Lb        | 551                             | 617                             | 816                              | 838                                   | 1080                             |
| Crated Weights                          | Lb        | 600                             | 680                             | 880                              | 920                                   | 1160                             |

\*DIMENSIONS WITH POLISHED S/S SIDES

| PROVINO II DELI PASTRY - REMOTE |           |                                 |                                 |                                  |                                       |                                  |
|---------------------------------|-----------|---------------------------------|---------------------------------|----------------------------------|---------------------------------------|----------------------------------|
| TECHNICAL FEATURES              |           | MODELS                          |                                 |                                  |                                       |                                  |
| Model Name<br>(Model Code)      |           | PROVINO II DP700<br>(PROVINO1P) | PROVINO II DP800<br>(PROVINO1P) | PROVINO II DP1390<br>(PROVINO2P) | PROVINO II DP1390-2T<br>(PROVINO1P)X2 | PROVINO II DP2075<br>(PROVINO3P) |
| External Dimensions (L-D-H)     | Inches    | *27 1/2" - 28 1/4" - 97 3/8"    | *31 1/2" - 28 1/4" - 97 3/8"    | *54 5/8" - 28 1/4" - 97 3/8"     | *82 5/8" - 28 1/4" - 97 3/8"          | *81 3/4" - 28 1/4" - 97 3/8"     |
| Inches-MM                       | MM        | *700 - 719 - 2474               | *800 - 719 - 2474               | *1388 - 719 - 2474               | *1388 - 719 - 2474                    | *2075 - 719 - 2474               |
| Crated Dimensions (L-D-H)       | Inches    | 35" - 35" - 108"                | 38 3/5" - 35" - 108"            | 61 4/5" - 35" - 108"             | 62 4/5" - 35" - 108"                  | 88 4/5" - 35" - 108"             |
| Inches-MM                       | MM        | 880 - 870 - 2744                | 980 - 870 - 2745                | 1570 - 870 - 2746                | 1570 - 870 - 2746                     | 2255 - 870 - 2748                |
| Refrigeration                   | Type      | Fan - Ventilated                | Fan - Ventilated                | Fan - Ventilated                 | Fan - Ventilated                      | Fan - Ventilated                 |
| Refrigeration Display Area      | Type      | Deck                            | Deck                            | Deck                             | Deck                                  | Deck                             |
| Number of Glass Doors           | #         | 1                               | 2                               | 2                                | 3                                     | 4                                |
| Operating Temperature           | °F        | 45°F to 58°F                    | 45°F to 58°F                    | 45°F to 58°F                     | 45°F to 58°F                          | 45°F to 58°F                     |
| Condensing Units                | #         | 1                               | 2                               | 2                                | 3                                     | 4                                |
| Compressor                      | Nr./Type  | 1 / Hermetic                    | 1 / Hermetic                    | 1 / Hermetic                     | 1 / Hermetic                          | 2 / Hermetic                     |
| BTU'S @ +14°F Evap Temperature  | BTU/H     | 2900                            | 3240                            | 4950                             | (2) 2400                              | 7200                             |
| Electric Supply                 | (V/Ph/Hz) | 220/1/60                        | 220/1/60                        | 220/1/60                         | (2) 220/1/60                          | 220/1/60                         |
| Power Consumption               | (W/A)     | 700/3.8                         | 700/3.8                         | 1360/7.6                         | (2) 680/3.6                           | 1970/11.1                        |
| Defrost                         | Mode/Type | Automatic                       | Automatic                       | Automatic                        | Automatic                             | Automatic                        |
| Climatic Class                  | *F/%RH    | 75°F-55%RH                      | 75°F-55%RH                      | 75°F-55%RH                       | 75°F-55%RH                            | 75°F-55%RH                       |
| Refrigerant Gas                 | Type      | R452a                           | R452a                           | R452a                            | R452a                                 | R452a                            |
| Pipe Size (Suction-Liquid)      | (INCHES)  | 15/32"- 15/64"                  | 15/32"- 15/64"                  | 35/64"- 5/16"                    | (2) 15/32"- 15/64"                    | 5/8" - 5/16"                     |
| Net Weights                     | Lb        | 551                             | 617                             | 816                              | 838                                   | 1080                             |
| Crated Weights                  | Lb        | 600                             | 680                             | 880                              | 920                                   | 1160                             |

\*DIMENSIONS WITH POLISHED S/S SIDES

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

