


# VENTURA

# Gelato Showcase

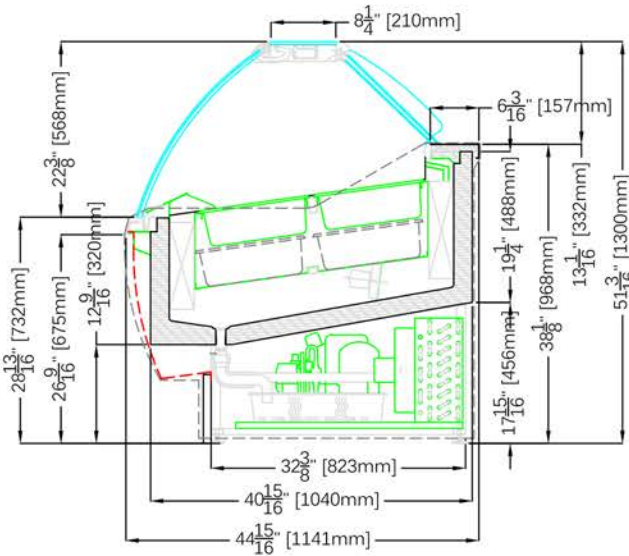

## STANDARD FEATURES

- Front and side heated glasses
- Reverse cycle defrost
- Semi-hermetic compressor
- LED lighting
- Self rolling curtain
- Cases ship standard unfinished


## OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Stainless steel or acrylic pans
- Round tubs
- Remote condensing unit
- Dipper well

- Cone holder
- RAL color/laminate front and side panels
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images below))



## Round Tubs Layouts (optional):

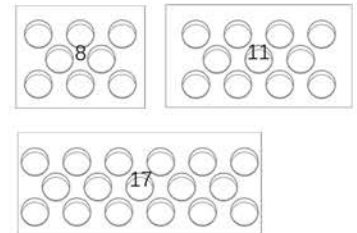

| VENTURA GELATO   |                   |                                    |                                  |                                    |                                    |
|--|-------------------|------------------------------------|----------------------------------|------------------------------------|------------------------------------|
| TECHNICAL FEATURES   |                   | MODELS                             |                                  |                                    |                                    |
|  |                   | VENTURA G1110                      | VENTURA G1610                    | VENTURA G2106                      | VENTURA G2106 Dual Temp            |
| External Dimensions (L-D-H)  | Inches            | * 43 11/16" - 44 15/16" - 51 3/16" | * 64 3/8" - 44 15/16" - 51 3/16" | * 82 15/16" - 44 15/16" - 51 3/16" | * 82 15/16" - 44 15/16" - 51 3/16" |
|  | MM                | * 1142 - 1141 - 1300               | * 1610 - 1141 - 1300             | * 2106 - 1141 - 1300               | * 2106 - 1141 - 1300               |
| Crated Dimensions (L-D-H)  | Inches            | 52" - 52" - 61"                    | 71" - 52" - 61"                  | 89" - 52" - 61"                    | 89" - 52" - 61"                    |
|  | MM                | 1320 - 1320 - 1550                 | 1803 - 1320 - 1550               | 2260 - 1320 - 1550                 | 2260 - 1320 - 1550                 |
| 5 Liter Pan Capacity*<br>14 3/16" x 6 1/2" x 4 3/4"<br>(360mm x 165mm x 120mm)   | Pan Configuration | 12                                 | 18                               | 24                                 | 24 (12+12)                         |
| 8 Liter Pan Capacity*<br>14 3/16" x 9 13/16" x 4 3/4"<br>(360mm x 250mm x 120mm) | Pan Configuration | 8                                  | 12                               | 16                                 | 16 (8+8)                           |
| Refrigeration  | Type              | Fan Ventilated                     | Fan Ventilated                   | Fan Ventilated                     | Fan Ventilated                     |
| Refrigeration Display Area   | Type              | Deck                               | Deck                             | Deck                               | Deck                               |
| Operating Temperature  | °C / °F           | -18°C / -0.4°F                     | -18°C / -0.4°F                   | -18°C / -0.4°F                     | (2) -18°C / -0.4°F                 |
| Compressor   | Nr./Type          | 1 / Semi-Hermetic                  | 1 / Semi-Hermetic                | 2 / Semi-Hermetic                  | 2 / Semi-Hermetic                  |
| BTU'S @ -25°F Evap Temperature   | BTU'S             | 6240 BTU'S                         | 9696 BTU'S                       | 11,584 BTU'S                       | 11,840 BTU'S                       |
|  |                   | 400/3/50 +N (UE)                   | 400/3/50 +N (UE)                 | 400/3/50 +N (UE)                   | 400/3/50 +N (UE)                   |
| Electric Supply  | (V/Ph/Hz)         | 208-220/3/60 (USA)                 | 208-220/3/60 (USA)               | 208-220/3/60 (USA)                 | 208-220/3/60 (USA)                 |
| Power Consumption  | (W/A)             | 1950W / 5.2A                       | 3030W / 8.4A                     | 1620W / 9.4A                       | 3700W / 9.4A                       |
| Defrost  | Mode/Type         | Reverse Cycle                      | Reverse Cycle                    | Reverse Cycle                      | Reverse Cycle                      |
| Climatic Class   | N°/°C/°F/H.R.     | 4+/35/95/70%                       | 4+/35/95/70%                     | 4+/35/95/70%                       | 4+/35/95/70%                       |
| Refrigerant Gas  | Type              | R404A                              | R404A                            | R404A                              | R404A                              |
| Net Weights  | Kg/Lb             | 245Kgs / 540Lbs                    | 312Kgs / 687Lbs                  | 405Kgs / 892Lbs                    | 405Kgs / 892Lbs                    |
| Crated Weights   | Kg/Lb             | 355Kgs / 782Lbs                    | 462Kgs / 1081Lbs                 | 590Kgs / 1300Lbs                   | 590Kgs / 1300Lbs                   |

\* DIMENSIONS ARE SHOWN WITHOUT SIDE PANELS

\* WITH SIDE PANELS ADD 3/8" ON BOTH ENDS

\* PANS ARE NOT INCLUDED



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

