

VISION II

Deli/Pastry/Beverage + Ice Cream Cakes/ Frozen Novelty Dual Temperature Showcases

STANDARD FEATURES

- Dual temp: all in one low and medium temperature
- Triple pane glass on all sides
- Tempered glass shelving
- No defrost shut down requirement for low temp
- Dixell digital controller
- LED lighting
- Lockable casters
- Cases ship standard silver finish
- Available lengths: 26"L and 34"L



OPTIONS

- Front and back access doors
- Custom color finish or stainless steel base
- Adjustable legs



VISION II DUAL TEMPERATURE

TECHNICAL FEATURES		Single Door				Double Doors (Front & Back)			
		VII6314 H60	VII6314 H76	VII8314 H60	VII8314 H76	VII6314D H60	VII6314D H76	VII8314D H60	VII8314D H76
External Dimensions (L-D-H)	Inches	26" - 25 1/2" - 60"	26" - 25 1/2" - 76"	34" - 25 1/2" - 60"	34" - 25 1/2" - 76"	26" - 27 3/4" - 60"	26" - 27 3/4" - 76"	34" - 27 3/4" - 60"	34" - 27 3/4" - 76"
	Inches-MM	660 - 647 - 1524	660 - 647 - 1930	863 - 647 - 1524	863 - 647 - 1930	660 - 647 - 1524	660 - 647 - 1930	863 - 704 - 1524	863 - 704 - 1930
Crated Dimensions (L-D-H)	Inches	36" - 32" - 67"	36" - 32" - 80"	40" - 32" - 67"	40" - 32" - 80"	36" - 33" - 67"	36" - 33" - 80"	40" - 33" - 67"	40" - 33" - 80"
	Inches-MM	914 - 812 - 1701	914 - 812 - 2032	1016 - 812 - 1701	1016 - 812 - 2032	914 - 838 - 1701	914 - 838 - 2032	1016 - 838 - 1701	1016 - 838 - 2032
Refrigeration	Type	R404A	R404A	R404A	R404A	R404A	R404A	R404A	R404A
Operating Temperature	°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F	0°F to +38°F
Compressor	Nr./Type	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic
BTU'S @ -25°F Evap	BTU'S	4200 BTU'S	4200 BTU'S	4400 BTU'S	4400 BTU'S	4200 BTU'S	4200 BTU'S	4400 BTU'S	4400 BTU'S
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60
Power Consumption	(A)	8A	8A	9A	9A	9A	9A	10A	10A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	F°/H.R.	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%
Net Weights	Kg/Lb	217Kgs / 435Lbs	257Kgs / 515Lbs	242Kgs / 485Lbs	282Kgs / 565Lbs	254Kgs / 508Lbs	294Kgs / 588Lbs	284Kgs / 568Lbs	324Kgs / 648Lbs
Crated Weights	Kg/Lb	245Kgs / 490Lbs	285Kgs / 570Lbs	270Kgs / 540Lbs	310Kgs / 620Lbs	265Kgs / 530Lbs	305Kgs / 610Lbs	302Kgs / 605Lbs	342Kgs / 685Lbs

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com




VISION II

Deli/Pastry/Beverage + Ice Cream Cakes/ Frozen Novelty Dual Temperature Showcases


SINGLE DOOR

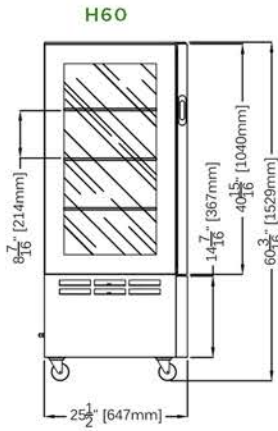


H76

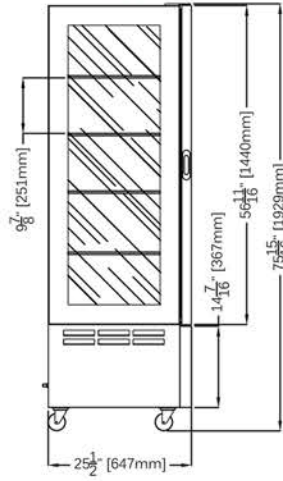

DOUBLE DOORS

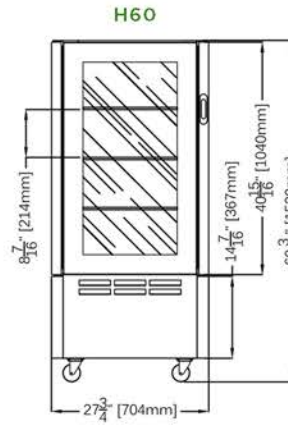


H76

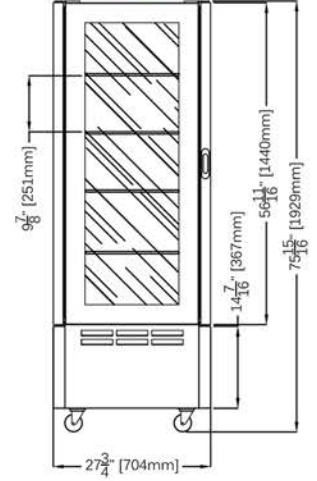


PLAN VIEWS:

SINGLE DOOR

VII6314 H60/H76




VII8314 H60/H76




DOUBLE DOORS

VII6314D H60/H76

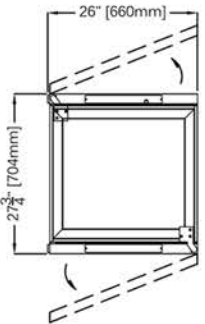


VII8314D H60/H76

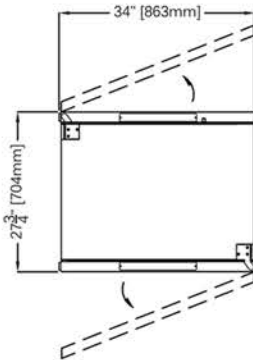


REAR ELEVATIONS:


VII6314 H60

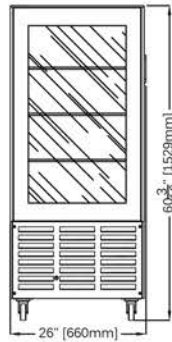


VII8314 H60

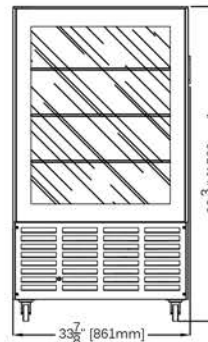

VII6314 H76

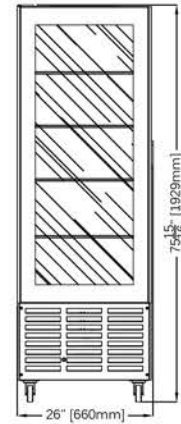


VII8314 H76

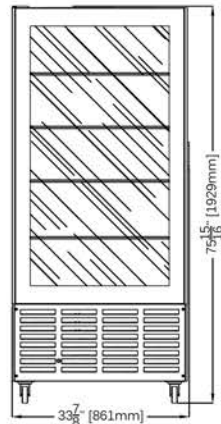


FRONT ELEVATIONS:


VII6314 H60




VII8314 H60

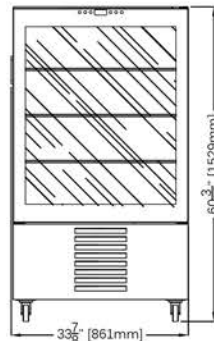

VII6314 H76

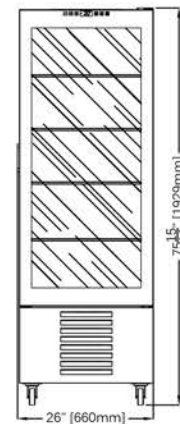

VII8314 H76

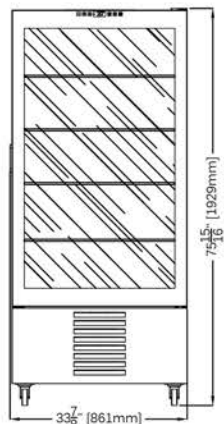

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

