



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

POZZETTI SHOWCASE

POZZETTI/BPLG WITH STORAGE:

PS2, PS4, PS6, PS8, PS10, PS12

POZZETTI/BPLG WITHOUT STORAGE:

P2, P4, P6, P8, P10, P12

STANDARD FEATURES

- Static GLYCOL refrigeration
- **PS MODELS ONLY:** storage under each container
- Stainless steel cylindrical containers 8lt (ø200mm - 250H) with antispin system
- Stainless steel lids
- One piece molded body
- 2,5" ecologic polyurethane insulation
- 304 stainless steel interior and external finish
- cETLus | ETL-Sanitation | Certified CE |
- Self-Contained
- Steel load-bearing structure
- Touch controller
- Adjustable feet
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Remote condensing unit
- Epoxy RAL color visible s/s on operator side
- Custom RAL/wood/stone/acrylic/quartz lids and poms
- Custom stone/acrylic/quartz worktop
- Unfinished panels to accept custom millwork by others
- Casters
- Sneeze guard with dimmable LED lighting
- Remote Water cooled condensing unit
- Custom front and side paneling
- Stainless steel scoop washer with fixed water tap
- Reinforced wood crate



Pozzetti PS10 showing storage from operator side



Pozzetti customizable lids

See Link below for all optional RAL colors and Materials Brochure

[RAL Colors Website](#)

[Materials Brochure PDF](#)

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400
sales@oscartek.com | www.oscartek.com




Discover the Art of Display...

POZZETTI/BPLG WITH STORAGE: PS2, PS4, PS6, PS8, PS10, PS12


POZZETTI/BPLG WITHOUT STORAGE: P2, P4, P6, P8, P10, P12

PLAN VIEWS

P2, PS2

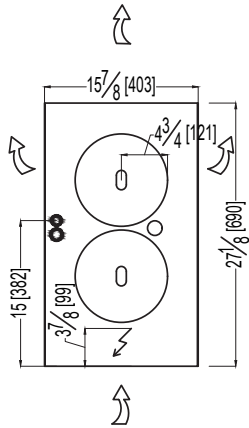


P4, PS4

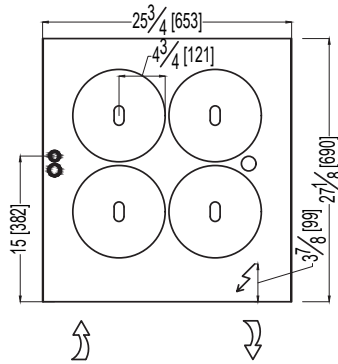


ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

**ARROWS SHOW EXHAUST
AND INTAKE VENTS ON
THE CASE**


P6, PS6

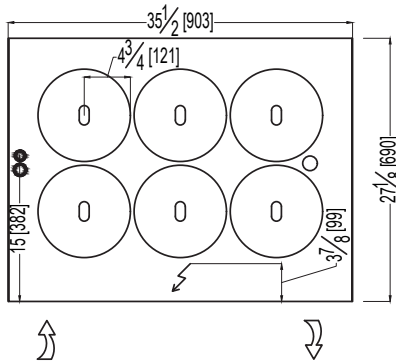


P8, PS8

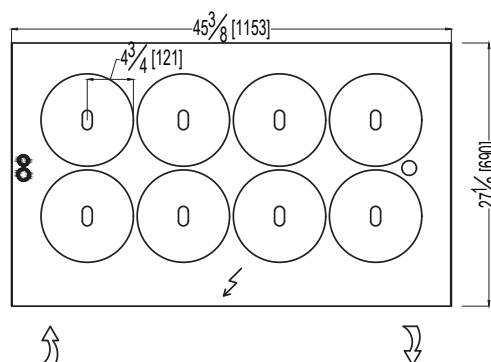

P10, PS10

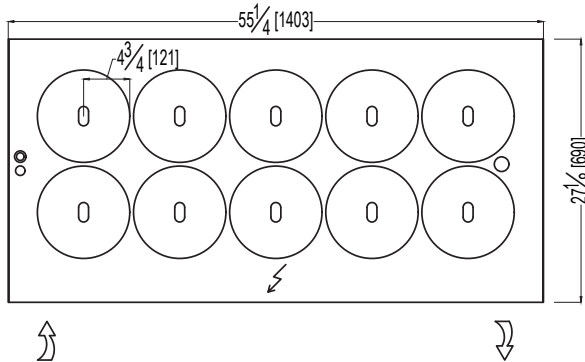

P12, PS12

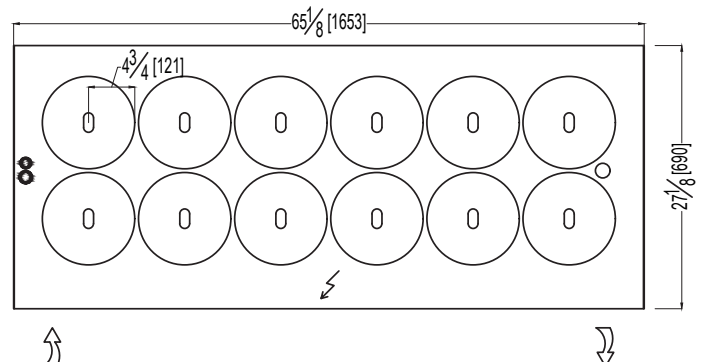

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400
sales@oscartek.com | www.oscartek.com


Discover the Art of Display...

POZZETTI/BPLG WITH STORAGE: PS2, PS4, PS6, PS8, PS10, PS12


POZZETTI/BPLG WITHOUT STORAGE: P2, P4, P6, P8, P10, P12

REAR ELEVATION VIEWS


P2, PS2

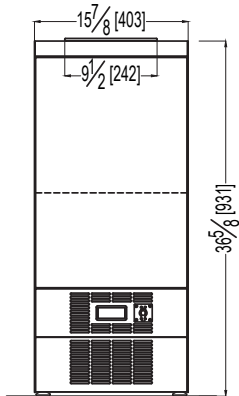


P4, PS4

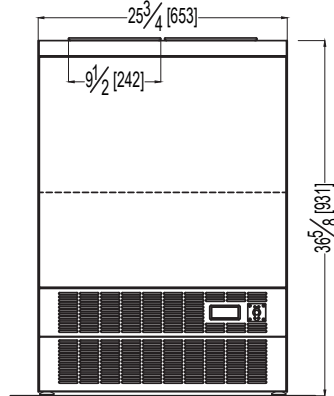


P6, PS6

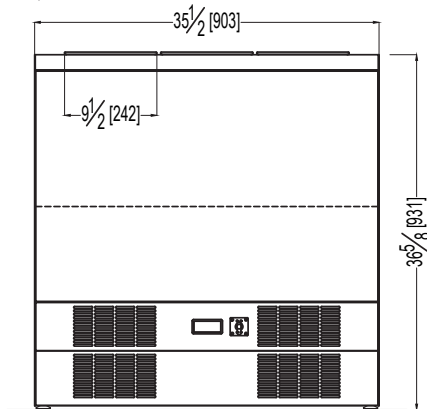


P8, PS8

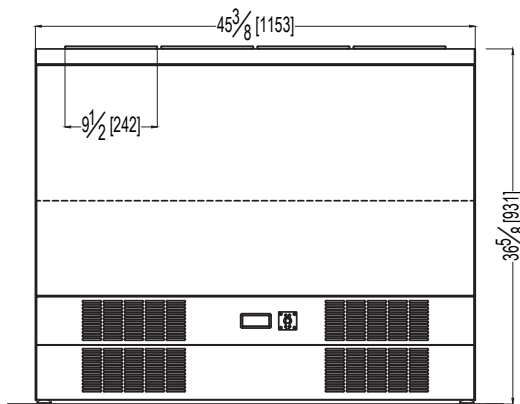

P10, PS10

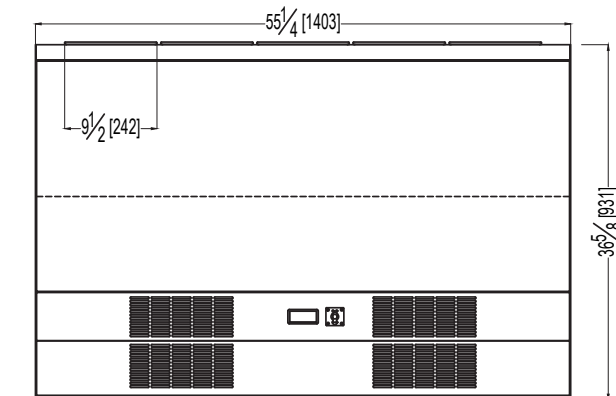

P12, PS12

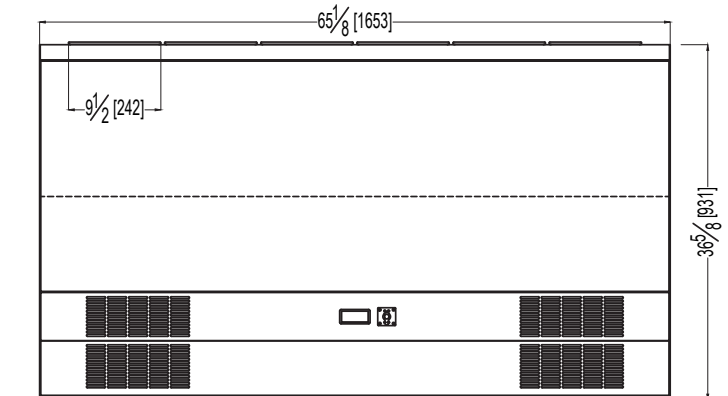

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.


OSCARTEK
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400
 sales@oscartek.com | www.oscartek.com




POZZETTI/BPLG WITHOUT STORAGE: P2, P4, P6, P8, P10, P12

SECTION VIEWS

STANDARD

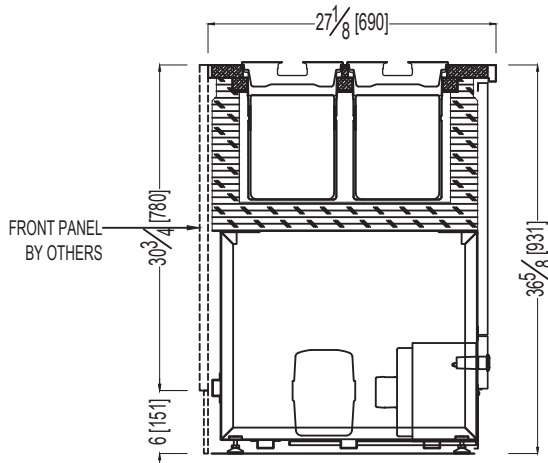


OPTIONAL: SNEEZE GUARD

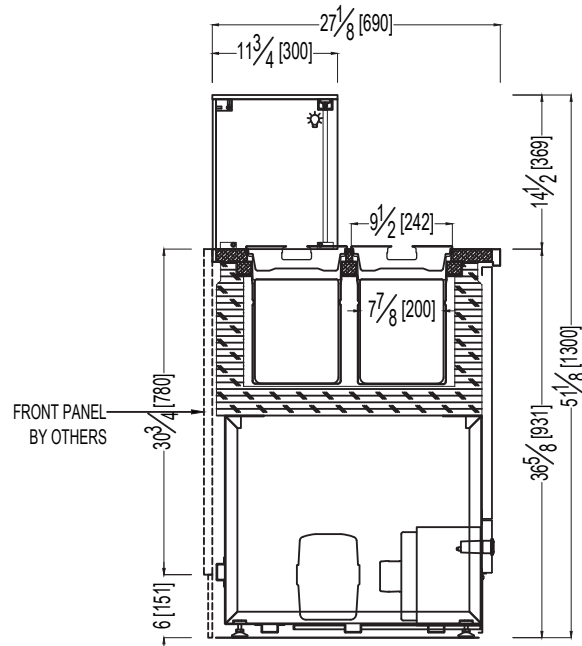


POZZETTI/BPLG WITH STORAGE: PS2, PS4, PS6, PS8, PS10, PS12

SECTION VIEWS

STANDARD

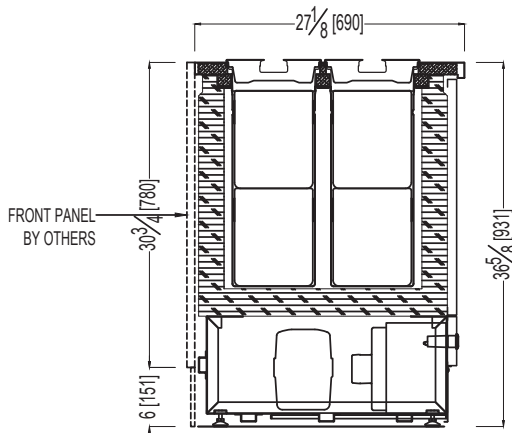

OPTIONAL: SNEEZE GUARD

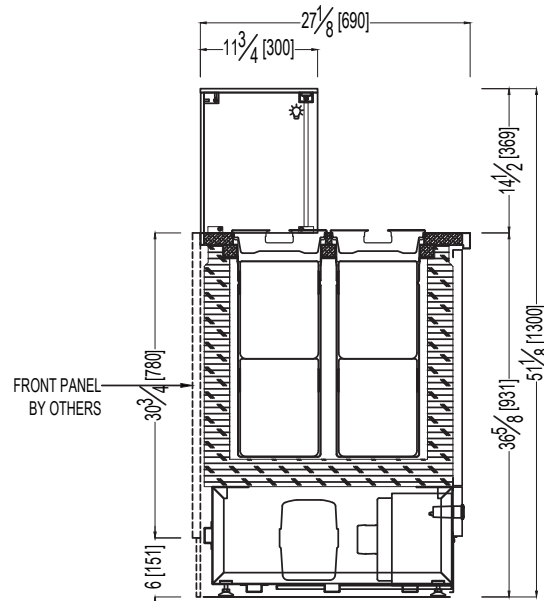

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Project Name: _____
Item #: _____ Quantity: _____

Discover the Art of Display...

POZZETTI/BPLG WITHOUT STORAGE: P2, P4, P6, P8, P10, P12

DATA TABLES

POZZETTI/BPGL WITHOUT STORAGE				
Technical Features		MODELS		
MODEL NUMBER (MODEL CODE)		POZZETTI/BPGL P2 (BPGL2P65H75)	POZZETTI/BPGL P4 (BPGL4P65H75)	POZZETTI/BPGL P6 (BPGL6P65H75)
External Dimensions(L-D-H)	Inches MM	15 7/8" 27 1/8" 36 5/8" 403mm L 690mm D 931mm H	25 3/4" 27 1/8" 36 5/8" 653mm L 690mm D 931mm H	35 1/2" 27 1/8" 36 5/8" 903mm L 690mm D 931mm H
Crated Dimensions(L-D-H)	Inches MM	23"L 35"D 48"H 580mm L 870mm D 1201mm H	33"L 35"D 48"H 830mm L 870mm D 1201mm H	43"L 35"D 48"H 1080mm L 870mm D 1201mm H
Refrigeration	Type	STATIC GLYCOL	STATIC GLYCOL	STATIC GLYCOL
Refrigeration Display Area	Type	TUBS	TUBS	TUBS
Operating Temperature	°F(°C)	0°F (-18°C)	0°F (-18°C)	0°F (-18°C)
Compressor	Nr./Type	1/Hermetic	1/Hermetic	1/Hermetic
BTU'S @ -13°F Expansion Temperature	BTU'S	350	550	900
Electric Supply	V/Ph/Hz	120/1/60	120/1/60	120/1/60
Power Consumption	W/A	250/2.6	270/2.6	300/2.9
Climate Class	°F/RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290
Pize Size(Inches)	Suction, Liquid	25/64" , 15/64"	25/64" , 15/64"	25/64" , 15/64"
Net Weights	Lb	132	220	287
Crated Weights	Lb	300	400	500

POZZETTI/BPGL WITHOUT STORAGE				
Technical Features		MODELS		
MODEL NUMBER (MODEL CODE)		POZZETTI/BPGL P8 (BPGL8P65H75)	POZZETTI/BPGL P10 (BPGL10P65H75)	POZZETTI/BPGL P12 (BPGL12P65H75)
External Dimensions(L-D-H)	Inches MM	45 3/8" 27 1/8" 36 5/8" 1153mm L 690mm D 931mm H	55 1/4" 27 1/8" 36 5/8" 1403mm L 690mm D 931mm H	65 1/8" 27 1/8" 36 5/8" 403mm L 690mm D 931mm H
Crated Dimensions(L-D-H)	Inches MM	53"L 35"D 48"H 1330mm L 870mm D 1201mm H	53"L 35"D 48"H 1580mm L 870mm D 1201mm H	53"L 35"D 48"H 1830mm L 870mm D 1201mm H
Refrigeration	Type	STATIC GLYCOL	STATIC GLYCOL	STATIC GLYCOL
Refrigeration Display Area	Type	TUBS	TUBS	TUBS
Operating Temperature	°F(°C)	0°F (-18°C)	0°F (-18°C)	0°F (-18°C)
Compressor	Nr./Type	1/Hermetic	1/Hermetic	1/Hermetic
BTU'S @ -13°F Expansion Temperature	BTU'S	1250	1500	1900
Electric Supply	V/Ph/Hz	120/1/60	120/1/60	120/1/60
Power Consumption	W/A	370/3.9	450/4.5	550/5.3
Climate Class	°F/RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290
Pize Size(Inches)	Suction, Liquid	25/64" , 15/64"	15/32" , 15/64"	15/32" , 15/64"
Net Weights	Lb	375	441	507
Crated Weights	Lb	600	700	800

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400
sales@oscartek.com | www.oscartek.com





Project Name: _____
Item #: _____ Quantity: _____

Discover the Art of Display...

POZZETTI/BPLG WITH STORAGE: PS2, PS4, PS6, PS8, PS10, PS12

DATA TABLES

POZZETTI/BPGL WITH STORAGE				
Technical Features		MODELS		
MODEL NUMBER (MODEL CODE)		POZZETTI/BPGL PS2 (BPGL2+2P65H75)	POZZETTI/BPGL PS4 (BPGL4+4P65H75)	POZZETTI/BPGL PS6 (BPGL6+6P65H75)
External Dimensions(L-D-H)	Inches MM	15 7/8" 27 1/8" 36 5/8" 403mm L 690mm D 931mm H	25 3/4" 27 1/8" 36 5/8" 653mm L 690mm D 931mm H	35 1/2" 27 1/8" 36 5/8" 903mm L 690mm D 931mm H
Crated Dimensions(L-D-H)	Inches MM	23"L 35"D 48"H 580mm L 870mm D 1201mm H	33"L 35"D 48"H 830mm L 870mm D 1201mm H	43"L 35"D 48"H 1080mm L 870mm D 1201mm H
Refrigeration	Type	STATIC GLYCOL	STATIC GLYCOL	STATIC GLYCOL
Refrigeration Display Area	Type	TUBS	TUBS	TUBS
Operating Temperature	°F(°C)	0°F (-18°C)	0°F (-18°C)	0°F (-18°C)
Compressor	Nr./Type	1/Hermetic	1/Hermetic	1/Hermetic
BTU'S @ -13°F Expansion Temperature	BTU'S	450	850	1200
Electric Supply	V/Ph/Hz	120/1/60	120/1/60	120/1/60
Power Consumption	W/A	270/2.6	300/2.9	370/3.9
Climate Class	°F/RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290
Pize Size(Inches)	Suction, Liquid	25/64" , 15/64"	25/64" , 15/64"	25/64" , 15/64"
Net Weights	Lb	176	265	353
Crated Weights	Lb	320	440	550

POZZETTI/BPGL WITH STORAGE				
Technical Features		MODELS		
MODEL NUMBER (MODEL CODE)		POZZETTI/BPGL PS8 (BPGL8+8P65H75)	POZZETTI/BPGL PS10 (BPGL10+10P65H75)	POZZETTI/BPGL PS12 (BPGL12+12P65H75)
External Dimensions(L-D-H)	Inches MM	45 3/8" 27 1/8" 36 5/8" 1153mm L 690mm D 931mm H	55 1/4" 27 1/8" 36 5/8" 1403mm L 690mm D 931mm H	65 1/8" 27 1/8" 36 5/8" 1653mm L 690mm D 931mm H
Crated Dimensions(L-D-H)	Inches MM	53"L 35"D 48"H 1330mm L 870mm D 1201mm H	53"L 35"D 48"H 1580mm L 870mm D 1201mm H	53"L 35"D 48"H 1830mm L 870mm D 1201mm H
Refrigeration	Type	STATIC GLYCOL	STATIC GLYCOL	STATIC GLYCOL
Refrigeration Display Area	Type	TUBS	TUBS	TUBS
Operating Temperature	°F(°C)	0°F (-18°C)	0°F (-18°C)	0°F (-18°C)
Compressor	Nr./Type	1/Hermetic	1/Hermetic	1/Hermetic
BTU'S @ -13°F Expansion Temperature	BTU'S	1500	2000	2300
Electric Supply	V/Ph/Hz	120/1/60	120/1/60	120/1/60
Power Consumption	W/A	450/4.5	550/5.3	650/6.3
Climate Class	°F/RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290
Pize Size(Inches)	Suction, Liquid	15/32" , 15/64"	15/32" , 15/64"	15/32" , 15/64"
Net Weights	Lb	441	529	617
Crated Weights	Lb	620	730	840

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400
sales@oscartek.com | www.oscartek.com

