

PROVINO II FROZEN

MODELS: PROVINO II G700, G800, G1390

STANDARD FEATURES

- Glass sides and back
- Triple pane glass premium door
- Steel load bearing structure
- 3000°K LED lighting with dimmer switch
- Touch Control
- Ventilated cooling
- interior vertical shelf support in stainless steel
- adjustable feet
- standard steel 304A
- stainless steel interior and exterior
- Glass shelves adjustable in height on racks (7 shelves included per door)
- programmed automatic electric defrost
- Approvals: cETLus, ETL sanitation, certified CE
- Remote condensing unit
- Condensate evaporator pan

OPTIONS

- RAL Color Option powder coated door handles exterior and interior over stainless
- Front wood laminate door and handles
- interior shelf trim
- Front wood laminate storage doors finish on base
- top door and interior shelf trim
- Top door
- door locks
- water cooled
- central refrigeration rack
- 60 Hz components UL
- Narrow Depth
- Heated glass
- Solid sides & back



Provino II Frozen

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)




[Materials Brochure PDF](#)

**Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*




OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com

MODELS: PROVINO II G700, G800, G1390

PROVINO II PLAN VIEWS




PROVINO II REAR ELEVATIONS (OPERATOR SIDE)

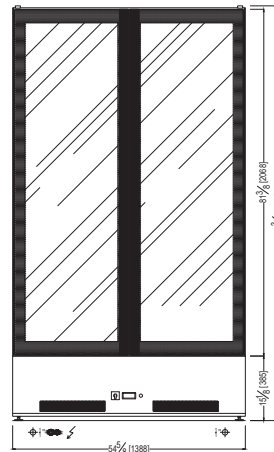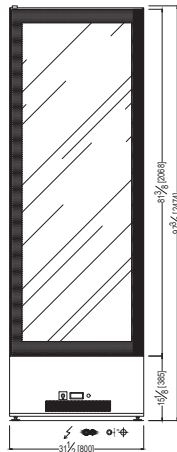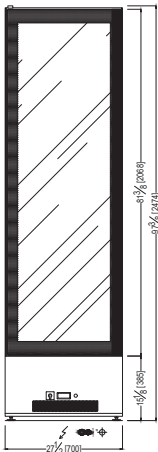

ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

PROVINO II STANDARD - REMOTE WITH SHELVES SECTION VIEW

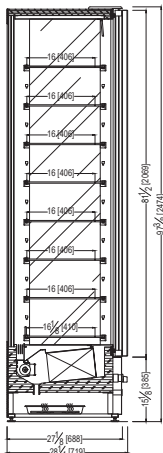

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com



MODELS: PROVINO II G700, G800, G1390

PROVINO II FROZEN - REMOTE				
TECHNICAL FEATURES		MODELS		
Model Name (Model Code)		PROVINO II G700 (METROGEL12)	PROVINO II G800 (METROGEL12)	PROVINO II G1390 (METROGEL18)
External Dimensions (L-D-H) Inches-MM	Inches MM	*27 1/2" - 28 1/4" - 97 3/8" *700 - 719 - 2474	*31 1/2" - 28 1/4" - 97 3/8" *800 - 719 - 2474	*54 5/8" - 28 1/4" - 97 3/8" *1388 - 719 - 2474
Crated Dimensions (L-D-H) Inches-MM	Inches MM	35" - 35" - 108" 880 - 870 - 2744	38 3/5" - 35" - 108" 980 - 870 - 2745	61 4/5" - 35" - 108" 1570 - 870 - 2746
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck
Number of Glass Doors	#	1	2	2
Operating Temperature	°F	-5°F to 5°F	-5°F to 5°F	-5°F to 5°F
Condensing Units	#	1	2	2
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ -31°F Evap Temperature	BTU/H	3750	4100	6140
Electric Supply	(V/Ph/Hz)	220/3/60	220/3/60	220/3/60
Power Consumption	(W/A)	2300/11.5	2300/11.5	4600/16.5
Defrost	Mode/Type	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R452a	R452a	R452a
Pipe Size (Suction-Liquid)	(INCHES)	45/64"- 25/64"	45/64"- 25/64"	55/64"- 25/64"
Net Weights	Lb	551	617	816
Crated Weights	Lb	600	680	880

*DIMENSIONS WITH POLISHED S/S SIDES

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

